

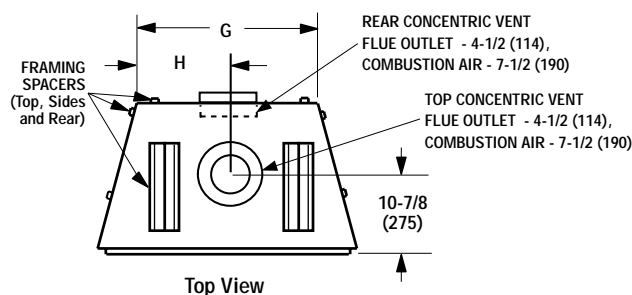


EDV-3530, EDV-4035, EDV-4540

Appliance Specifications

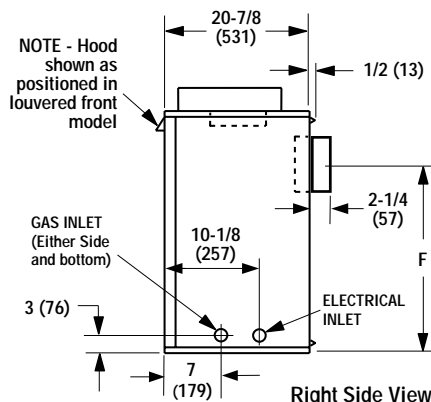

Model No.		A	B	C	D	E	F	G	H
EDV3530	in.	40-1/8	37-1/8	24	29-1/2	35-1/8	27-1/2	21-1/2	10-3/4
	mm	1019	943	609	749	892	698	546	273
EDV4035	in.	40-1/8	37-1/8	24	34-1/2	40-1/8	27-1/2	26-1/2	13-3/4
	mm	1019	943	609	876	1019	698	675	337
EDV4540	in.	40-1/8	37-1/8	24	39-1/2	45-1/8	27-1/2	31-1/2	15-3/4
	mm	1019	943	609	1003	1146	698	802	401

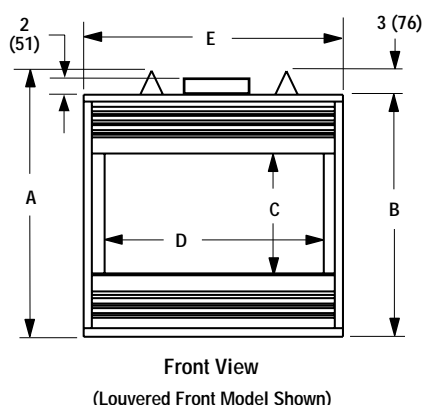


Note: All specifications, ratings and dimensions are subject to change without notice.

Fireplace Finishes

Mantels And Trim

Vertical installation clearances to combustible mantels vary according to the depth of the mantel. The figure below details these required clearances. Mantels constructed of non-combustible materials may be installed at any height above the appliance opening, however, do not allow anything to hang below the eyebrow.

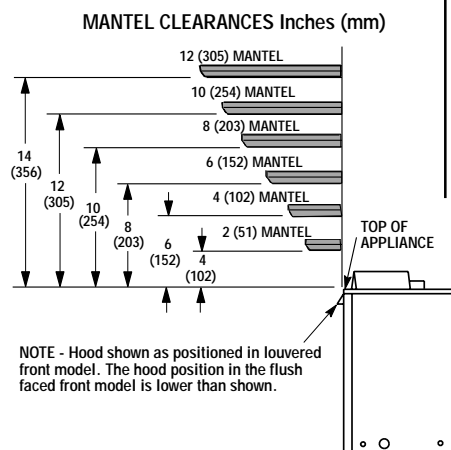

Minimum Clearance To Combustibles


A hearth extension is not required with this appliance. If a hearth extension is used, do not block the control compartment access panel. Any hearth extension used is for appearance only and does not have to conform to standard hearth extension installation requirements.

Note: Combustible wall finish materials and/or surround materials must not be allowed to encroach the area defined by the appliance front face (black sheet metal). Never allow combustible materials to be positioned in front of or overlapping the appliance front face.

Note: Paint or lacquer uses to finish the mantel must be heat resistant in order to avoid discoloration.

Wall Details

Combustible materials may project beyond the sides of the fireplace opening as long as they are kept within the shaded areas illustrated in the figure below.

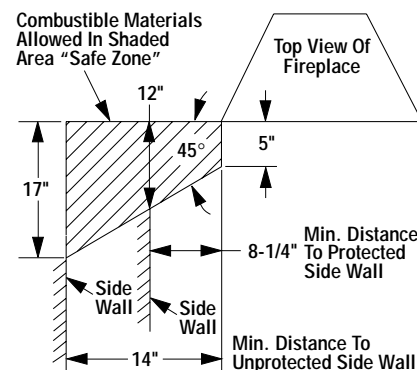


Note: Diagrams, illustrations and photographs are not to scale - Consult Installation Instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.

LENNOX
HEARTH PRODUCTS

EDV-3530, EDV-4035, EDV-4540


Typical Installation

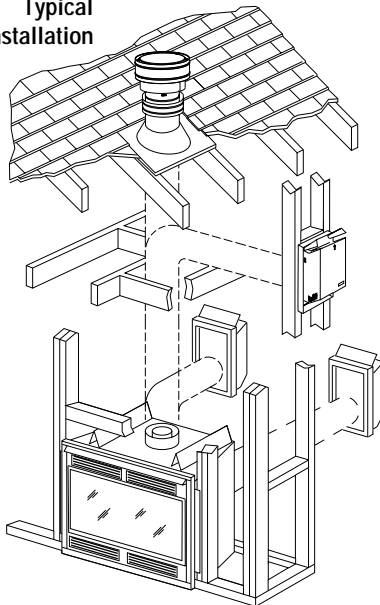

Clearances To Combustibles

Back	1/2 in. - 0 in. spacers
Sides	1/2 in. - 0 in. spacers
Top Spacers	0 in.
Floor	0 in.
Vent	1 in.*
Vent Seal Cap	1 in.
SERVICE CLEARANCES	
Front Back Or Side	3 Feet

* 3" above any horizontal vent component

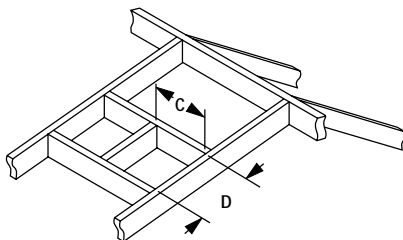


Framing Dimensions for Roof

Pitch	C	D
0/12	10-1/2 in. (267 mm)	10-1/2 in. (267 mm)
6/12	10-1/2 in. (267 mm)	12 in. (305 mm)
12/12	10-1/2 in. (267 mm)	17-3/4 in. (451 mm)

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.



Framing Specifications

Note: Nailing flange is adjustable from 5/8" to 1/2".

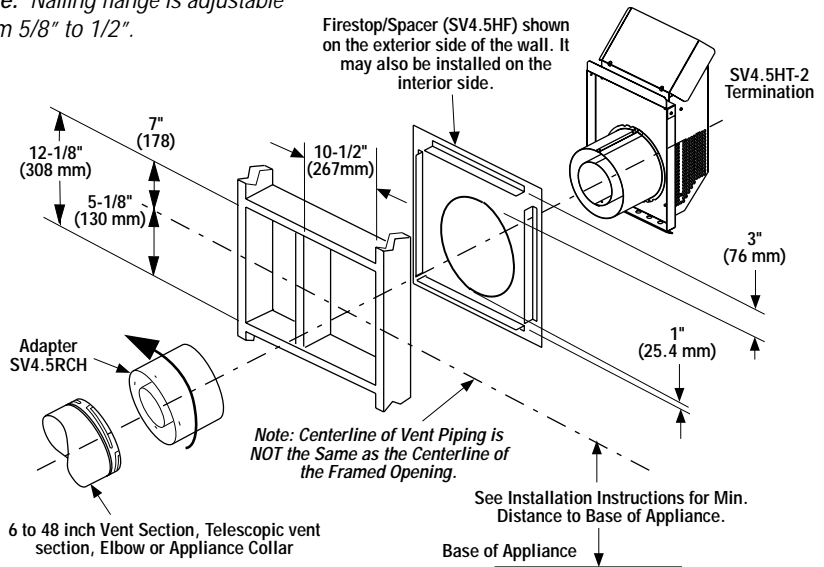

Vent Clearances

	Top	Sides	Bottom
Horizontal	3 in.	1 in.	1 in.
Vertical	1 in.	1 in.	1 in.

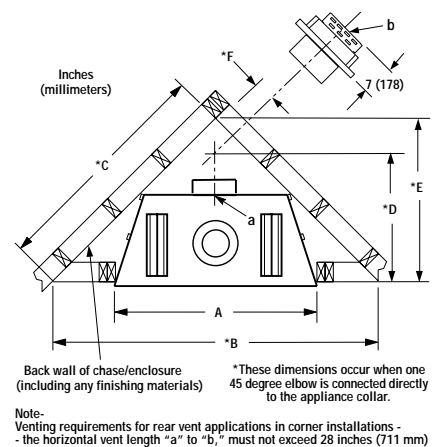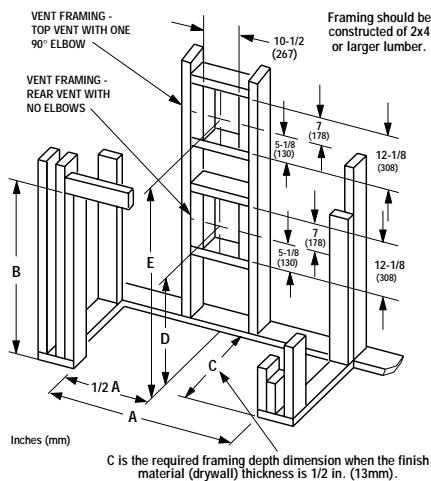

Model No.	A	B	C (REAR VENT)	C (TOP VENT)	D	E
EDV3530	in. 35-1/4 mm 896	40-1/4 1022	20-7/8 530	23-5/8 600	27-1/2 699	46-3/4 1187
EDV4035	in. 40-1/4 mm 1022	40-1/4 1022	20-7/8 530	23-5/8 600	27-1/2 699	46-3/4 1187
EDV4540	in. 45-1/4 mm 1149	40-1/4 1022	20-7/8 530	23-5/8 600	27-1/2 699	46-3/4 1187

Model No.	A	B	C	D	E	F
EDV3530	in. 35-1/8 mm 892	65-1/2 1664	46-5/16 1176	25-11/16 652	32-3/4 832	5 127
EDV4035	in. 40-1/8 mm 1019	67-3/4 1721	47-7/8 1216	25-11/16 652	33-7/8 860	5 3/4 146
EDV4540	in. 45-1/8 mm 1146	72-3/4 1848	51-7/16 1307	25-1/16 652	36-3/8 924	7 1/2 191

Note: All framing dimensions calculated for 1/2" drywall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.

LENNOX
HEARTH PRODUCTS