



A classic design combined with high-efficiency heating performance to provide your home with relaxing, reliable warmth.

LENNOX
HEARTH PRODUCTS

MERIT™
SERIES

With its classic styling, convenient features and incredible heat output, the Firestar™ gas insert will satisfy even the most demanding homeowner. An expansive bay window is one of the largest available and provides an unobstructed view of dancing flames and glowing embers. With up to 39,000 BTUs, the Firestar is capable of heating substantial areas—even during power outages. Precision heat control is easy with the convenient control panel or wall thermostat.



Stainless steel heat exchanger



STANDARD FEATURES

- 1 Durable stainless steel heat exchanger provides high efficiency with or without a blower
- 2 Drop-down viewing door for easy cleaning
- 3 Removable top trivet for steaming or cooking
- 4 Controls are conveniently located for easy access and user-friendly operation
- 5 Triple-burner design produces a realistic flame pattern and glowing embers for a remarkable fire presentation
- 6 Captivating fire and glowing ceramic-fiber split wood-style logs create warmth and ambiance
- 7 Standing pilot millivolt system allows for efficient operation, even during power outages

Door, grille, surround trim and trivet available in gold, nickel, or black finishes. Mix and match to create the look you desire

Heavy steel construction for years of trouble-free use

Limited Lifetime Warranty


OPTIONAL ACCESSORIES

24K gold- or nickel-plated trivet


Gold or nickel surround trim

Remote or wall thermostat

MINIMUM FIREPLACE OPENING



MINIMUM CLEARANCE TO COMBUSTIBLES



*When not using standard 2" bottom trim piece. Combustible mantel clearance may be reduced with the use of a mantel shield. See owners manual for details.


HEARTH PROTECTION

HEARTH HEIGHT	3/8"	2"	3"	4"
HEARTH EXTENSION	20"	17"	17"	0"
HEARTH WIDTH (MIN.)	33-1/2"			


Minimum hearth protection to be 3/8"-thick non-combustible material or equivalent.

UNIT DIMENSIONS

Top View

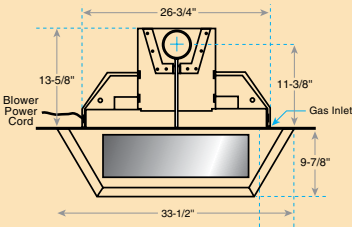

Side View



Note: Insert protrudes 9-7/8" in front of flange. Insert front supports are available for use with installations into zero-clearance fireplaces. See owners manual for hearth clearances and installation details when not using standard 2" bottom trim piece under insert. Always use owners manual for hearth planning and installation.

All specifications are for reference only and should not be used for actual installation. Use installation instructions for actual installation.

SPECIFICATIONS

HEATING CAPACITY*	900 – 2,000 SQ. FT.
BTU INPUT	NATURAL GAS HIGH 39,000 / LOW 27,500 LP GAS (PROPANE) HIGH 39,000 / LOW 22,600
CANADIAN ENERGY GUIDE RATING	NATURAL GAS 67.09% LP GAS (PROPANE) 69.02%
STEADY-STATE EFFICIENCY**	80% – 84%
VENT PIPE	4" GAS-RATED B-VENT OR LISTED SINGLEWALL GAS VENT CHIMNEY LINER
BLOWER	150-CFM VARIABLE-SPEED (STANDARD)
POWER OUTAGE OPERATION	YES***
ZERO-CLEARANCE (METAL) AND METAL MASONRY FIREPLACE APPROVED	YES

*Square-feet heating capacities are approximations only. Local conditions such as elevation, wind vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling heights, climate, accessories chosen, appliance location and how the appliance is operated.

**Efficiency varies slightly with various pipe configurations.

***Power outage prevents the use of blower.

LENNOX

HEARTH PRODUCTS

© Lennox Industries Inc. 2010

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.

PGC1973 785213M 10/10

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Approved to U.S. safety and performance standards—ANSI Z21.88/CSA 2.33-M98 vented gas fireplace heaters.



Tested & Listed By **O-T-L** US
Portland Oregon USA
OMNI-Test Laboratories, Inc.



100% recycled