
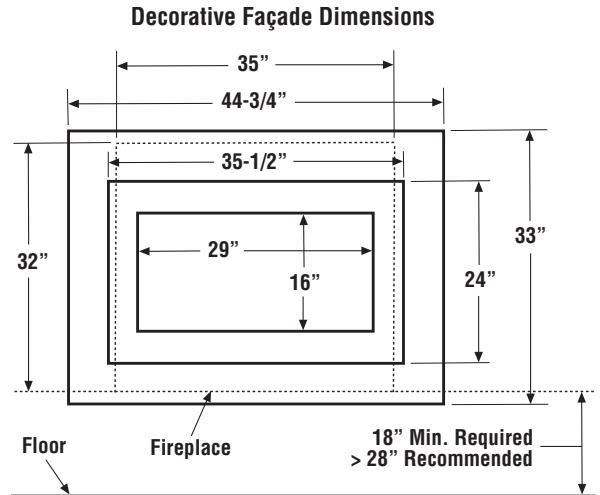


MLDVTCD-35 SERIES

DIRECT VENT FIREPLACE SPECIFICATIONS

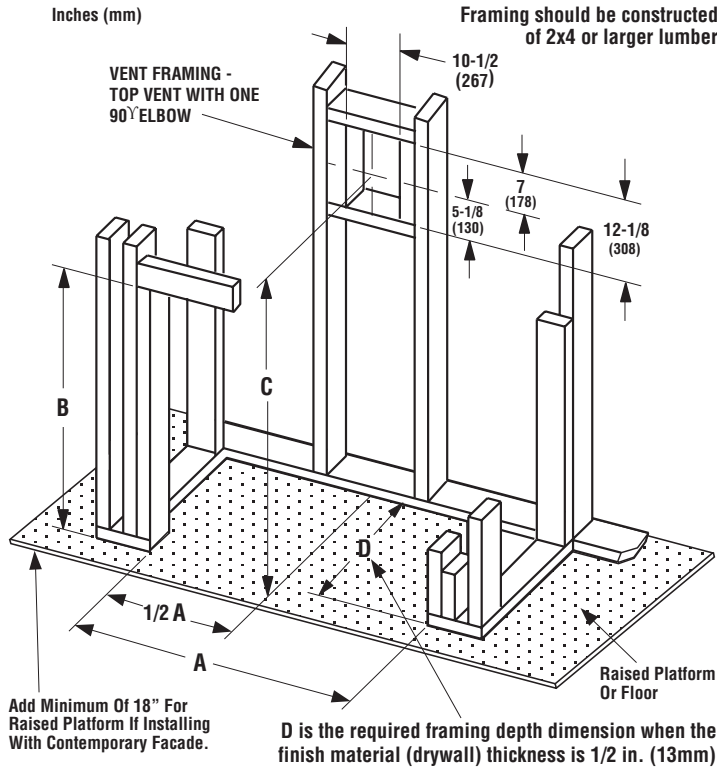


Note: When raising the MLDVTCD appliance on a platform for mid-wall installations, add the platform height to any of the framing dimensions shown.

Framing Dimensions					
Model No.		A	B	C	D
MLDVTCD-35	in.	35-1/4	35-1/4	39-1/4	16
	mm	895	895	997	406

Vertical Venting Through the Ceiling:

Frame ceiling opening - Use a plumb line from the ceiling above the appliance to locate center of the vertical run. Cut and/or frame an opening, 10-1/2" x 10-1/2" (267 mm x 267 mm) inside dimensions, about this center mark.

Viewable Glass Size		Vent Size	
35" Model	29-1/4" Wide 20-1/4" High	Co-axial DV Vent Size	4-1/2" Inner 7-1/2" Outer

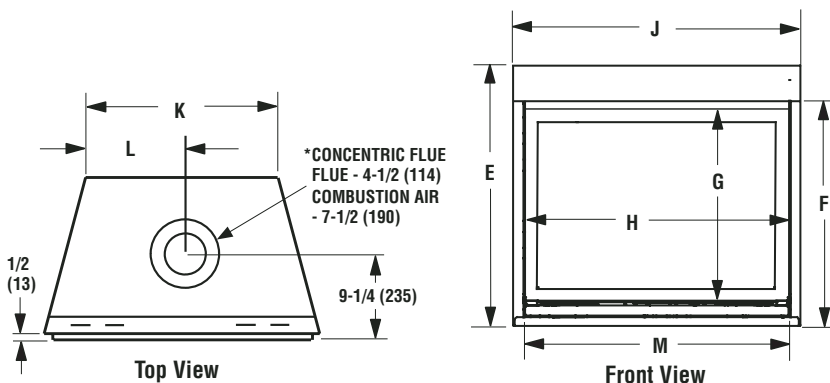


NOTE - It is recommended that the gas be studded in from the left side only.

ELECTRICAL INLET KNOCKOUT - 2-3/4" X 2" (70 X 51) COVER PLATE (With KNOCKOUT - Right Side Only)

GAS INLET KNOCKOUT (Other Side)

OPTIONAL ELECTRICAL INLET KNOCKOUT, REQUIRING A FIELD PROVIDED JUNCTION BOX (Either Side)

NOTE - Eyebrow hood shown.

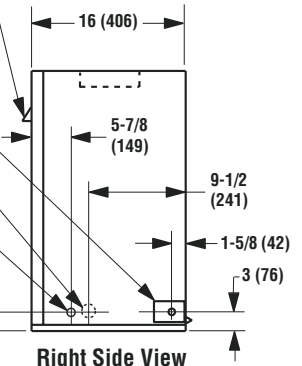

Model No.		E	F	G	H	J	K	L	M
MLDVTCD-35	in.	32-1/4	28-1/8	23-1/4	32	35-1/4	25	12-1/2	33
	mm	819	715	587	813	892	635	317	838

Tested & Listed By **OTL** US
OMNI-Test Laboratories, Inc. Portland Oregon USA

OTL Report No. 116-F-54-5

LENNOX
HEARTH PRODUCTS

MLDVTCD-35 SERIES

DIRECT VENT FIREPLACE SPECIFICATIONS

Input (BTU) Manually-Modulated Gas Valves (all models)	
NATURAL GAS	
Model	Input Rate (BTU / HR)
MLDVTCD-35N	14,500 high 11,500 low


Input (BTU) Manually-Modulated Gas Valves (all models)	
PROPANE GAS**	
Model	Input Rate (BTU / HR)
MLDVTCD-35P	13,500 high 10,500 low

**Propane Conversion Kit Available

Product Reference Information			
Cat. No.	Model	Ship. Weight	Ship. Volume
H7514	MLDVTCD-35NM	86 lb.	10.61 cu. ft.
H7515	MLDVTCD-35NE	86 lb.	10.61 cu. ft.


Model No.	Combustible Shelf Height - Inches (millimeters)	
	Top Vent - with One 90 Degree Elbow	
	Secure Vent	Secure Flex (flex elbow)
MLDVTCD-35	*46-1/2 (1181)	*48-1/4 (1226)

* Includes 3" clearance to combustibles (required above vent components)






Shelf Above Fireplace With Top Venting




Model	Natural Gas		Propane**	
	P4	Steady State	P4	Steady State
MLDVTCD-35	48	52	51	56



MINIMUM CLEARANCES Inches (millimeters)	
Back	1/2 (13) 0 (0) Spacers Or Dimples
Sides	1/2 (13)** 0 (0) Spacers Or Dimples
Top	3 (76)
Floor	0 (0)
Bottom of Appliance To Ceiling	64 (1626)
Vent	3 (76) Top * 1 (25.4) Sides & Bottom
SERVICE CLEARANCES Feet (meters)	
Front	3 ft. (0.9 m)

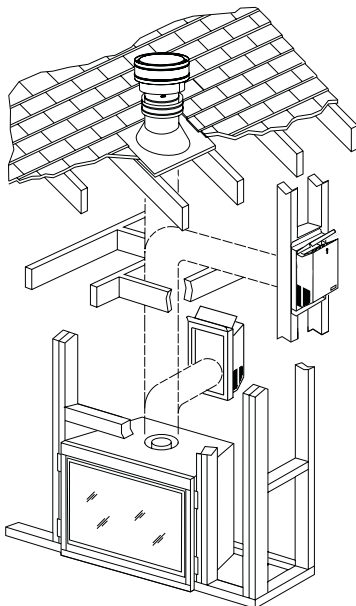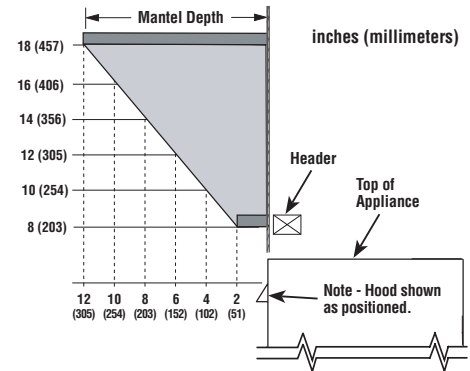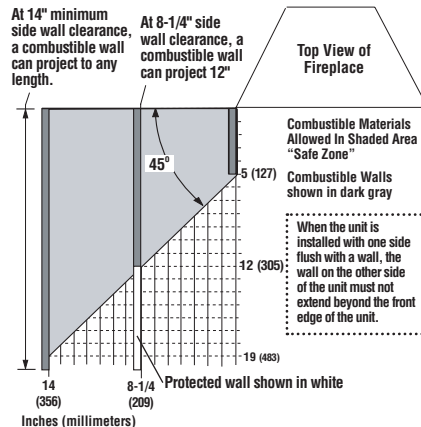

Typical Installation

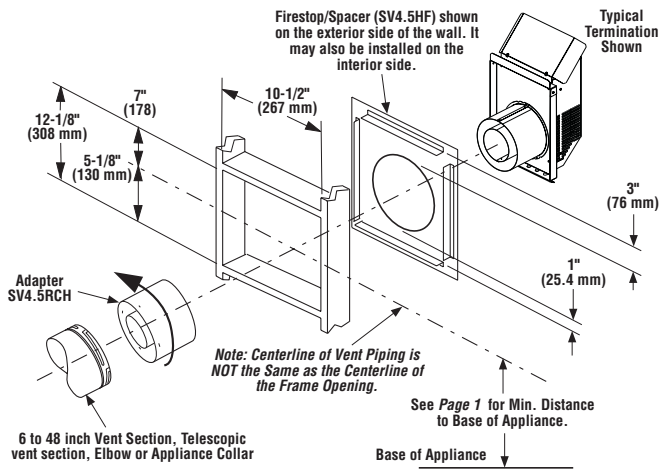

Note: Specification and clearances are subject to change without notice. Refer to the Installation Instructions before installation of these appliances for updated dimensions and instructions. Diagrams and illustrations are not to scale.

LENNOX
HEARTH PRODUCTS