MPB35ST

Millivolt Models Electr
MPB35ST-NM MPB3
MPB35ST-PM

Electronic Models
MPB35ST-NE


SPECIFICATIONS		
Natural Gas BTU Input	30,000	
Propane Gas BTU Input	28,000	
B-Vent Size	5 in. (127 mm)	

NOTES


Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.

PRODUCT REFERENCE INFORMATION				
Cat. No.	Model	Ship Weight	Ship Volumn	
H3204	MPB35ST-NM	200 lbs	46W x 26D x 43H (30 cu.ft.)	
H3205	MPB35ST-PM	200 lbs	46W x 26D x 43H (30 cu.ft.)	
H3206	MPB35ST-NE.	200 lbs	46W x 26D x 43H (30 cu.ft.)	

EFFICIENCIES		
ENERGUIDE	22 % Natural Gas 23 % Propage Gas	

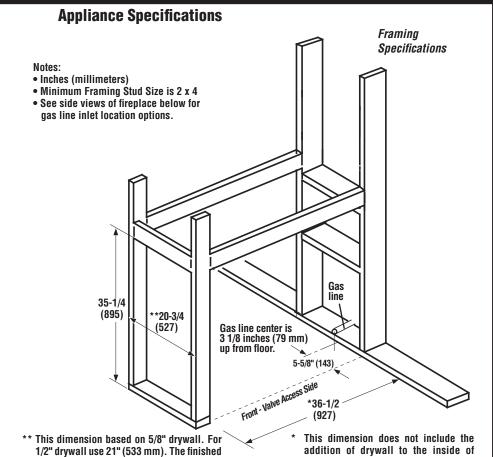

framing. Adjust accordingly for your

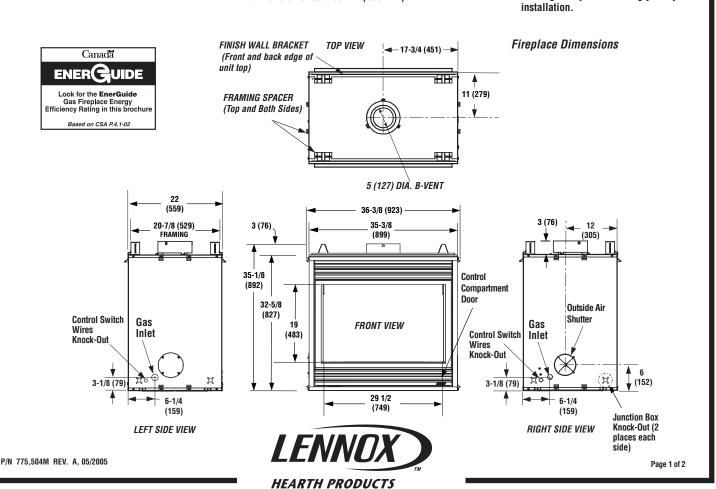

dimension should be 22" (558 mm).


MPB35ST

Millivolt Models MPB35ST-NM MPB35ST-PM Electronic Models
MPB35ST-NE

Appliance Clearances


B-VENT SEE-THROUGH MERIT® PLUS SERIES

Minimum Mantel Clearances

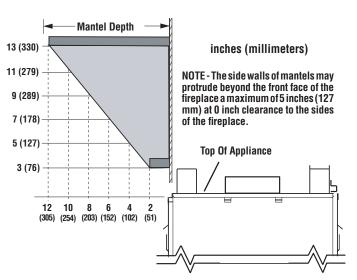

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.


MINIMUM CLEARANCES Inches (millimeters)			
Sides	1/2 (13)		
Top Spacers	0 (0)		
Floor	0 (0)		
Bottom of Appliance To Ceiling	72 (1829)		
Vent	1 (25.4)		
SERVICE CLEARANCES Feet (meters)			
Front & Back Faces	3 ft. (0.9 m)		



Printed in U.S.A. © 2005 by LENNOX HEARTH PRODUCTS **P/N 775,504M REV. NC 05/2005**



Typical Installations



Minimum Distance to Unprotected Side Wall

Combustible Materials Allowed In Shaded Area "Safe Zone" Inches (millimeters) Top View of Fireplace At 5" minimum side wall clearance, the wall (shown in dark gray) can be any length. 1 (25) 2 (51) 45° 3 (76) 4 (102) 5 (127) 6 (152) 7 (178) 8 (203) -9 (229)

Minimum Side Clearances

5 4 3 2 1 (127) (102) (76) (51) (25) 10 (250)