




Handsome cast-iron stove with four optional enamel colors displays a captivating fire with realistic split oak-style logs and customized flame control.






The Serefina™ free-standing stoves from Lennox perfectly capture the tradition and grace of cast-iron comfort and design. With a variety of gorgeous features at your disposal, you can easily create the stove that fits your personal style and room environment. Standard warming shelves with removable inlays add the perfect touch. And when it comes to heating, Serefina stoves produce consistent, powerful warmth that makes any room relaxing and full of ambiance.

OPTIONAL ACCESSORIES 1 2 3 4



^{*}Serefina™ comes standard with black paint finish.

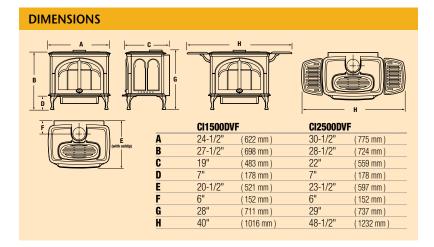

PRODUCTS AND DEALERS YOU CAN COUNT ON

Lennox is committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is as important as choosing the right brand, and our dealers are a big reason why you can count on getting quality customer service when you call.

NOTE: Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices subject to change or discontinuance without notice. Square-foot heating capacities are approximations only. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect the overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, celling heights, climate, accessories chosen, appliance location and how the appliance is operated. Approved to U.S. and Canadian safety and performance standards—ANSI Z21.88/CSA 2.33-M98 vented gas fireplace heaters.



© Lennox Industries Inc. 2011

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.

OPTIONAL ACCESSORIES

Warming shelves with removable cast inlays


2 Ceramic brick liner kit

Firescreen:

- S Flat
- **4** Choice of three wireless remote controls:
- I. Model RCL On/Off wireless remote with LCD screen
- II. Model RCL-STAT same as Model RCL remote plus thermostatic control, timer and clock
- III. Model RCL-M same as Model RCL-T remote plus flame adjustment and fan control

Blower kit

Wall thermostat



SPECIFICATIONS		
	CI1500DVF	CI2500DVF
Min/Max BTU/hr input NG	17,500 / 28,000	25,500 / 38,500
Min/Max BTU/hr input LP	20,500 / 27,000	26,500 / 34,500
DV Vent Size	4" x 6-5/8"	4" x 6-5/8"
Convection Blower CFM	150	150
Weight (lbs.)	206	290

EFFICIENCIES		
	CI1500DVF	CI2500DVF
EnerGuide	67% (NG)	67% (NG)
	65% (LP)	64% (LP)
STEADY-STATE EFFICIENCY*	85% (NG)	83% (NG)
	87% (LP)	85% (LP)

^{*}Based on maximum vent configuration.

