

PRODUCT SPECIFICATIONS

# SB44/SB44HB Biltmore Radiant Wood Burning Fireplaces



### FIREPLACE OPENING

Front opening width: 44"  
 Front opening height: 27"

### TECHNICAL INFORMATION





Flue Series (Std.): 11CF Double Wall Chimney  
 Flue Size: 11" Inner; 13-3/8" Outer  
 Clearance to Flue: 2"  
 Firestop Framing: 17-1/2" x 17-1/2"  
 Minimum Flue Height: 15'  
 Maximum Flue Height: 86'  
 Minimum Height with 2 Elbows: 15'  
 Minimum Height with 4 Elbows: 21'  
 Clearance to Fireplace: 1-1/2"  
 Minimum Hearth Size (D x L): 20" x 68"  
 UL/ULC Design Certified

### FACTORY INSTALLED OPTIONS

Refractory firebrick: SB44 model  
 Refractory Herringbone firebrick: SB44HB model

### FIELD INSTALLED ACCESSORIES

Glass Doors: GDB54 (Black), GDPB54 (Polished Brass), GD54SS (Stainless)  
 Outside Air Kit: AK4, FP4U, 403  
 Terminations (Std.): RLTCF11, RLTCF11L, SLTCF11 & Traditional Chase Shrouds

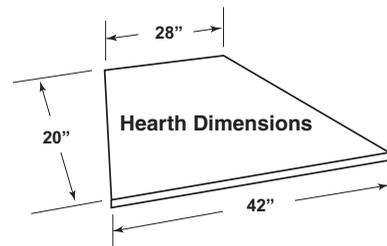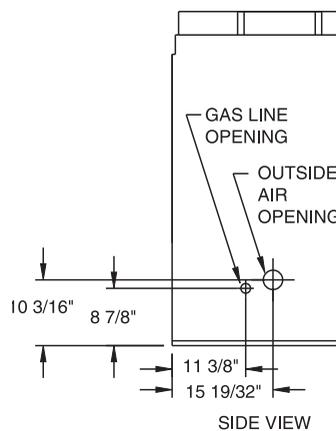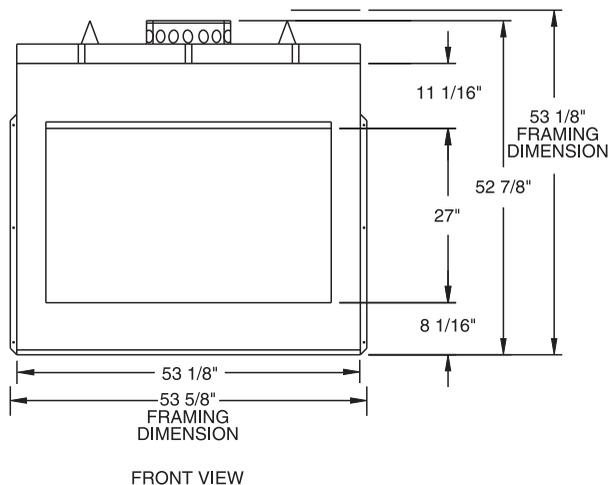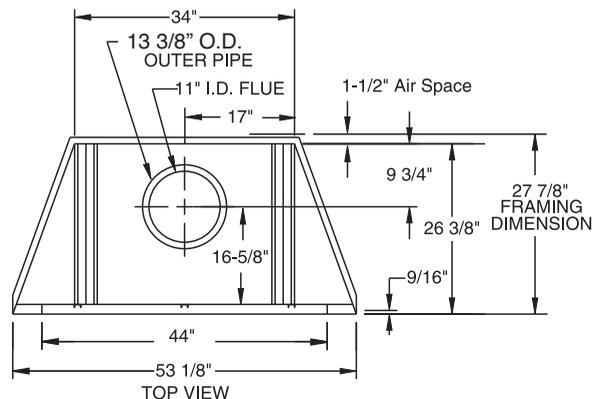

Framing dimensions in illustrations accommodate 1/2" finishing material.



A Brand of Monessen Hearth Systems Co.  
 149 Cleveland Drive, Paris, Kentucky 40361  
[www.majesticproducts.com](http://www.majesticproducts.com)



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. 09/09