RE CHIEF 30

FC300F WOOD BURNING FURNACE

EXCEPTIONAL QUALITY AT AN AFFORDABLE PRICE

CONSTRUCTION

High grade, heavy gauge steel, continuously welded for maximum structural strength.

CAST IRON GRATE

Allows fine ash to drop into ash pan and leave the hot coals in the firebox.

BLOWER SYSTEM STANDARD

Thermostatically controlled blower with optional filter box delivers warm air, reducing the cost of heating your home.

PRE-WIRED ELECTRICAL SYSTEM

Pre-wired for your convenience, reducing installation time and expense.

REMOVABLE ASH PAN

For safety and convenience.

OPTIONAL ACCESSORIES

Water Coil with Hole Saw
8" Back Draft Damper
Filter Box


| Model FC300F Specifications | |
|---------------------------------|-----------------|
| Weight | 260 lb. approx. |
| Height | 40.5" |
| Width | 20" |
| Depth | 24" |
| Log Size | 22" |
| Fire Chamber Volume | 4.00 cu. ft. |
| BTUs - Maximum | 80,000 approx. |
| Heating (Sq. Ft.) | up to 1,200 |
| Flue Size | 6" |
| Blower Capacity | 490 cfm |
| Hot Air Plenum Size | 8" round |
| Warranty - Firebox | 5 year limited |
| Warranty - Grates, Casting | 5 year limited |
| Door Size | 13"x14" |
| Height to Center of Flue Collar | 35.25" |







The BTU ranges and heating capacity specifications are provided as guidelines only and in no way guarantee the output or capacity of the units. The actual BTU output depends on the type of fuel being burned and its conditions, the draft adjustment and the chimney that the unit is hooked up to. The actual area that the units will heat depends on factors such as the conditions of the building, heat loss, type of construction, amount of insulation, type of air movements, and the location of the unit

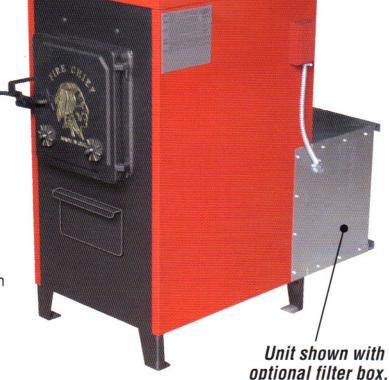

TYPICAL INSTALLATION WITH

Requires 16" x 20" x 1" filter.

EXISTING GAS OR OIL FURNACE (use only with Class "A" all-fuel chimney)



Manufactured by:



Barnhart, MO 63012 Phone: 636-942-4747 or 800-875-4788 Email: ing@firechiefwoodfurnance.com

www.firechiefwoodfurnace.com