

# MATERIALE: POLIESTERE ARGENTO OPACO




**Intertek**

Control Number: 5019881

- INSTALL AND USE ONLY IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND LOCAL BUILDING CODES.
  - FOR USE WITH SOLID WOOD FUEL ONLY.
  - USE ONLY A LINED MASONRY OR LISTED TYPE HT FACTORY-BUILT CHIMNEY. USE 24-GA BLACK CHIMNEY CONNECTOR.
  - DO NOT OVERFIRE - IF HEATER OR CHIMNEY CONNECTOR GLOWS, YOU ARE OVERFIRING.
  - INSPECT AND CLEAN CHIMNEY FREQUENTLY - UNDER CERTAIN CONDITIONS OF USE, CREOSOTE BUILDUP MAY OCCUR RAPIDLY
  - HEARTH EXTENSION/COMBUSTIBLE FLOOR PROTECTION: IF INSTALLED ON A COMBUSTIBLE FLOOR, UNIT MUST BE PLACED ON A NON-COMBUSTIBLE FLOOR PROTECTOR EXTENDING AS IN THE DIAGRAM (\*).
  - DO NOT CONNECT THIS UNIT TO A CHIMNEY FLUE SERVING ANOTHER APPLIANCE.
  - THE COOK STOVES MUST BE INSTALLED WITH THE LEGS PROVIDED (IF APPLICABLE (E.G. MILLY UL-C), ATTACHED AS SHOWN IN THE INSTRUCTIONS. DO NOT OBSTRUCT THE SPACE BENEATH THE APPLIANCE.
  - REPLACE GLASS WITH ONLY CERAMIC GLASS.
  - KEEP VIEWING AND ASH REMOVAL DOORS TIGHTLY CLOSED DURING OPERATION.
  - CONTACT LOCAL BUILDING AND FIRE OFFICIALS ABOUT RESTRICTIONS AND INSTALLATION INSPECTION IN YOUR LOCAL AREA.
  - REFER TO INSTALLATION INSTRUCTIONS OR LOCAL BUILDING CODES WHEN PASSING EXHAUST SYSTEM THROUGH COMBUSTIBLE WALL OR CEILING.
- CAUTION: HOT WHILE IN OPERATION. DO NOT TOUCH. KEEP CHILDREN, CLOTHING AND FURNITURE AWAY. CONTACT MAY CAUSE SKIN BURNS.**
- CONSULT THE MANUFACTURER'S INSTRUCTIONS FOR FURTHER INFORMATION.

## SOLID FUEL COOK STOVE TESTED AND CERTIFIED TO: UL 1482 AND ULC S627

ROSA XXL UL-C	ROSA L UL-C	MILLY UL-C	ROSA UL-C	ROSA SINISTRA REVERSE UL-C	ROSA UL-C
<input type="checkbox"/> STEEL	<input type="checkbox"/> STEEL	<input type="checkbox"/> STEEL	<input type="checkbox"/> CERAMIC	<input type="checkbox"/> CERAMIC	<input type="checkbox"/> CERAMIC
<input type="checkbox"/> STONE			<input type="checkbox"/> STONE	<input type="checkbox"/> STONE	<input type="checkbox"/> STONE
<input type="checkbox"/> MANOLEA			<input type="checkbox"/> MANOLEA	<input type="checkbox"/> MANOLEA	<input type="checkbox"/> MANOLEA

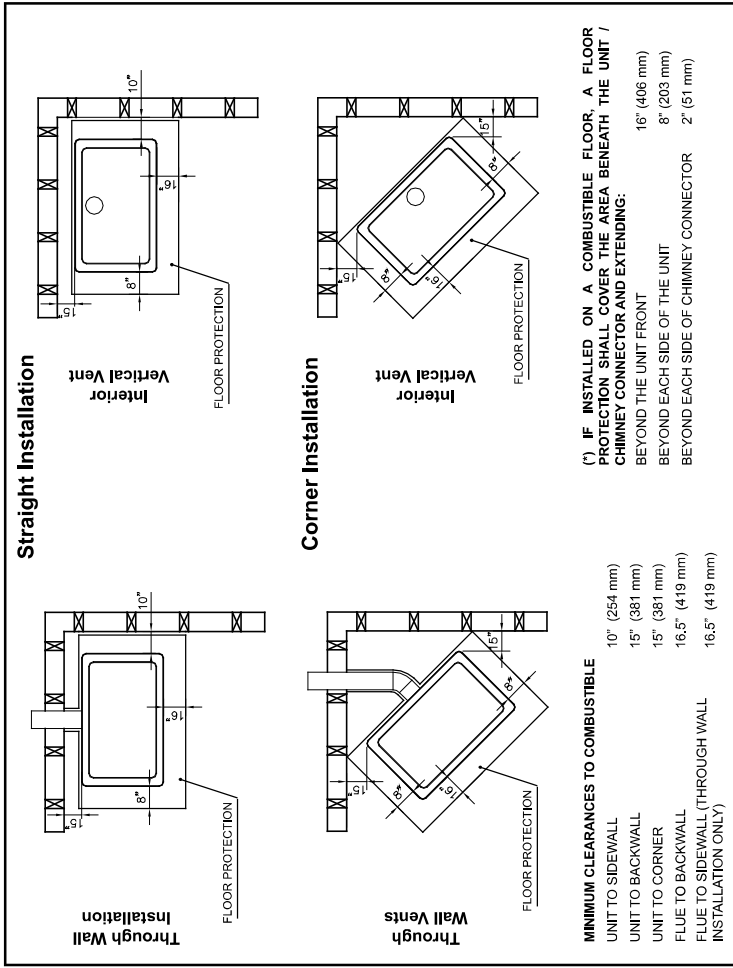

(\*) IF INSTALLED ON A COMBUSTIBLE FLOOR, A FLOOR PROTECTION SHALL COVER THE AREA BENEATH THE UNIT / CHIMNEY CONNECTOR AND EXTENDING:

BEYOND THE UNIT FRONT	16" (406 mm)
BEYOND EACH SIDE OF THE UNIT	8" (203 mm)
BEYOND EACH SIDE OF CHIMNEY CONNECTOR	2" (51 mm)

**MINIMUM CLEARANCES TO COMBUSTIBLE**

UNIT TO SIDEWALL	10" (254 mm)
UNIT TO BACKWALL	15" (381 mm)
UNIT TO CORNER	15" (381 mm)
FLUE TO BACKWALL	16.5" (419 mm)
FLUE TO SIDEWALL (THROUGH WALL INSTALLATION ONLY)	16.5" (419 mm)

Refer to the Intertek Directory of Building Products (<https://bpdirectory.intertek.com>) for detailed information.

Manufactured by : **La NORDICA S.p.A.**  
Via Summano, 104 - 36030 Montebelluna (TV) - ITALIA

**N. 1.000**  
**PEZZI**

**FORMATO DISPONIBILE in rotolo mm 210\*148**  
**uscita lato 210**