



Expansive viewing area and heat-circulating performance create the ideal room ambiance with an intense, active flame delivering warm and cozy heat.

LENNOX
HEARTH PRODUCTS


ELITE® SERIES



EDV3530 shown with standard trim and optional Buff Rustic brick liner kit.

■ The Elite® Series front-view direct-vent gas fireplace is the perfect example of how Lennox Hearth Products has revolutionized the convenience and comfort of gas fireplaces. Three various-sized models capture all the pleasure of a real wood-burning fire, but also add an amazing list of convenient and aesthetic features to the experience. Each fireplace has our exclusive natural dispersion burner, so it delivers consistent, cozy warmth—without all the mess of a wood fire. They are also specially designed to look authentic on or off, featuring unsurpassed features like a deluxe split oak-style log set, a brilliant flame presentation and a realistic interior. Plus, your fireplace can be customized exactly to your taste with an array of accessories sure to make any of these fireplaces an irresistible addition to your home. ■

OPTIONAL ACCESSORIES



STANDARD FEATURES

Louvered face and expansive front-glass view

Deluxe split oak-style log set (6 logs) on a rugged steel grate

Natural dispersion burner system for intense, warm flames that create a natural-looking fire

Tested and certified as a Vented Gas Fireplace Heater: ANSI Z21.88; CGA 2.33M98

Top and rear direct-vent outlets

Variable High/Low valve adjusts flame height and heat output (millivolt models only)

Easy-access flip-down fireplace control panel

Unit-mounted On/Off switch; pre-wired for wall switch

Choice of standing pilot millivolt system that operates even during a power failure, or electronic ignition

Durable, scratch-resistant powder-coated finish

Weld-free construction

Lennox Limited Lifetime Warranty

Backed by the Good Housekeeping Seal

OPTIONAL ACCESSORIES

1 Flush face panel

Ceramic brick liners available in:

- 2 Buff Rustic
- 3 Buff Old Cottage
- 4 Buff Herringbone

5 Polished brass or brushed stainless trim or louvers

Decorative filigree louvers are available in two finishes:

- 6 Sunrise style – powder-coated finish
- 7 Sunrise style – satin pewter finish

8 Choice of three wireless remotes:

- Model RCL – On/Off wireless remote with LCD screen
- Model RCL-STAT – On/Off wireless remote with LCD screen plus thermostatic control, timer and clock
- Model RCL-M – On/Off wireless remote with LCD screen, thermostatic control, timer and clock plus flame adjustment and fan control

9 Blower kits for improved heat distribution (not shown):

- FBK-100 – On/Off operation
- FBK-200 – Wall-mounted rheostat control
- FBK-250 – Temperature sensor control, plus unit-mounted rheostat control

10 Screen panel kits*

OPTIONAL FAÇADE STYLES



Louvered face w/optional full polished brass trim



Louvered face w/optional brushed stainless arch door trim



Louvered face w/optional brushed stainless eyebrow and door trim



Optional flush-face unit w/standard finish

OPTIONAL STYLE VIEW™ DOOR DESIGNS



Arch door



Arch pane door



Square pane door

Note: Style View™ doors available in satin pewter and charcoal finishes.

OPTIONAL LOUVER STYLES



Filigree Sunrise style louvers


*Screen panel kit provides a barrier to prevent direct contact with hot glass surface.

DIMENSIONS




EDV3530-B (35") EDV4035-B (40") EDV4540-B (45")


TOP & REAR DIRECT VENTING




Elite® Series front-view gas fireplaces have both top and rear direct-vent outlets. Select the best vent outlet for your application.

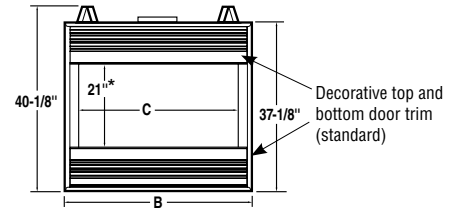


Louvered-Face Front



Optional Flush Face Front



Top View



Right Side View

*Viewable glass height 24" with decorative top and bottom door trim removed.

GAS FIREPLACE SPECIFICATIONS

MODEL	A	B	C	WIDTH	FRAMING HEIGHT	DEPTH*	BTU/hr
EDV3530	21-1/2"	35-1/8"	29-1/2"	35-1/2"	40-1/2"	22-1/4"	27,000
EDV4035	26-1/2"	40-1/8"	34-1/2"	40-1/2"	40-1/2"	22-1/4"	30,000
EDV4540	31-1/2"	45-1/8"	39-1/2"	45-1/2"	40-1/2"	22-1/4"	33,000

GAS FIREPLACE EFFICIENCY %


MODEL	CANADIAN ENERGUE RATING**	STEADY-STATE	AFUE***
EDV3530	61 NG / 61 LP	65 NG / 66 LP	63 NG / 64 LP
EDV4035	64 NG / 65 LP	66 NG / 66 LP	64 NG / 64 LP
EDV4540	63 NG / 62 LP	67 NG / 68 LP	65 NG / 66 LP

*23-3/4" if top venting. See installation manual for specifics.

**Intermittent ignition systems

***Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

TYPICAL ROOM APPLICATIONS



On the cover: EDV4035 shown with satin pewter arch pane Style View™ doors and Buff Rustic brick liner kit.

PRODUCTS AND DEALERS YOU CAN COUNT ON


At Lennox, we understand how important it is for you to feel comfortable at home, so we're committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is every bit as important as choosing the right brand, and we think you'll agree that our dealers are a big reason why you can count on getting quality customer service when you call.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



Tested & Listed By **OTL** US
OMNI-Test Laboratories, Inc.
Portland Oregon USA
Report number: 116-F-05-5



© Lennox Industries Inc. 2011

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.