



Country™ Collection wood-burning fireplace inserts provide efficient, clean-burning and reliable warmth for your home.

LENNOX
HEARTH PRODUCTS

COUNTRY™
COLLECTION



Striker™ C160 shown with optional brushed nickel-plated Traditional door, nickel-plated surround screws, and black variable-speed blower.

■ The Country™ Collection line of wood-burning inserts offers a complete selection of products to meet your heating needs. Available with an array of door styles and finishes, surrounds, and powerful heat circulating blowers, Country Collection inserts can be customized to suit your individual needs and tastes. In addition to a variety of options, every wood-burning insert that leaves our plant is built with premium-grade materials and the utmost commitment to quality. We incorporate innovative technology and designs to make Country Collection wood-burning inserts among the most beautiful, efficient, reliable, and environmentally friendly products on the market today. ■

STRIKER™ C160 – Small

600–1,300 SQ. FT. HEATING CAPACITY

The Striker™ C160 can turn your small masonry or factory-built fireplace into an efficient home heater. At 1.6 EPA grams per hour, the Striker C160 is one of the cleanest and most efficient non-catalytic wood inserts ever made, and is available with your choice of an Arch or Traditional door in a variety of finishes.

SPECIFICATIONS

| | | | |
|--------------------|-------------------|---------------------|----------|
| Log Length | 18" Max./16" Rec. | Insert Front Width | 23-1/8" |
| Firebox | 18"W x 14"D | Insert Front Height | 18-1/2" |
| EPA Grams Per Hour | 1.6 | Rear Width | 23-1/2" |
| Efficiency | 78.6% | Rear Height | 19-1/4" |
| Heating Capacity* | 600–1,300 sq. ft. | Chimney Diameter | 6" |
| Max. Heat Output* | 68,000 BTUs/hr. | Approximate Weight | 320 lbs. |
| Max. Burn Times* | 6–8 hrs. | | |



Striker™ CA160 shown with black Arch door.



Striker CA160 shown with gold-plated Arch door, gold-plated surround trim and gold-plated surround screws.



Performer™ C210 shown with gold-plated Traditional door, black blower, gold surround trim and gold-plated surround screws.

PERFORMER™ C210 – Medium

1,000–1,800 SQ. FT. HEATING CAPACITY

The Performer™ C210 offers increased heat output and easier loading. For moderate heating needs, the Performer C210 is the smart and efficient choice. Available with your choice of an Arch or Traditional door in a variety of finishes.

SPECIFICATIONS

| | | | |
|--------------------|---------------------|---------------------|----------|
| Log Length | 20" Max./18" Rec. | Insert Front Width | 25" |
| Firebox | 20"W x 18"D | Insert Front Height | 18" |
| EPA Grams Per Hour | 4.2 | Rear Width | 25-1/2" |
| Efficiency | 85% | Rear Height | 19" |
| Heating Capacity* | 1,000–1,800 sq. ft. | Chimney Diameter | 6" |
| Max. Heat Output* | 76,000 BTUs/hr. | Approximate Weight | 400 lbs. |
| Max. Burn Times* | 7–9 hrs. | | |

3 *Square-feet heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

LEGACY™ C260 – Large

1,200–2,200 SQ. FT. HEATING CAPACITY

With a heating capacity of 1,200–2,200 sq. ft. and maximum log length of 22-1/2", the Legacy™ C260 is the ideal choice for serious heating needs. Add an optional 225-CFM blower for more even heat in your home. Available with a Traditional door in a variety of finishes.

SPECIFICATIONS

| | | | |
|--------------------|-----------------------|---------------------|----------|
| Log Length | 22-1/2" Max./20" Rec. | Insert Front Width | 28" |
| Firebox | 22-1/2"W x 17-1/2"D | Insert Front Height | 20-1/2" |
| EPA Grams Per Hour | 4.1 | Rear Width | 28-1/2" |
| Efficiency | 79.2% | Rear Height | 22-1/2" |
| Heating Capacity* | 1,200–2,200 sq. ft. | Chimney Diameter | 6" or 8" |
| Max. Heat Output* | 79,000 BTUs/hr. | Approximate Weight | 493 lbs. |
| Max. Burn Times* | 7–11 hrs. | | |



Legacy™ C260 shown with brushed nickel-plated Traditional door and blower, nickel surround trim and nickel-plated surround screws.



Legacy C260 shown with 24K gold-plated Traditional door, 24K gold-plated blower, 24K gold-plated surround trim and gold-plated surround screws.



Canyon™ C310 shown with 24K gold-plated Traditional door, black blower and gold surround trim.

CANYON™ C310 – Extra-Large

1,600–3,000 SQ. FT. HEATING CAPACITY

The Canyon™ C310 is the largest wood insert in the Country™ Collection. When you need to heat a large area and want long burn times (7–12 hrs.), the Canyon C310 is the right choice. Available with a Traditional door in a variety of finishes.

SPECIFICATIONS

| | | | |
|--------------------|-----------------------|---------------------|----------|
| Log Length | 22-1/2" Max./20" Rec. | Insert Front Width | 28" |
| Firebox | 22-1/2"W x 19-1/2"D | Insert Front Height | 20-1/2" |
| EPA Grams Per Hour | 3.2 | Rear Width | 28-1/2" |
| Efficiency | 77.9% | Rear Height | 22-1/2" |
| Heating Capacity* | 1,600–3,000 sq. ft. | Chimney Diameter | 6" or 8" |
| Max. Heat Output* | 84,500 BTUs/hr. | Approximate Weight | 547 lbs. |
| Max. Burn Times* | 7–12 hrs. | | |

*Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

ELITE™ E260 – Large

1,200–2,200 SQ. FT. HEATING CAPACITY

The Elite™ E260 comes standard with features such as a gold-plated door, diamond-etched glass, and gold-plated side bay mirrors. But don't let the beautiful exterior fool you. The Elite E260 is still a serious heater and offers unsurpassed reliability and performance. Also available with plain glass and nickel accents.

SPECIFICATIONS

| | | | |
|--------------------|-----------------------|---------------------|----------|
| Log Length | 22-1/2" Max./20" Rec. | Insert Front Width | 48" |
| Firebox | 22-1/2"W x 17-1/2"D | Insert Front Height | 21-5/8" |
| EPA Grams Per Hour | 4.1 | Rear Width | 28-1/2" |
| Efficiency | 79.2% | Rear Height | 22-1/2" |
| Heating Capacity* | 1,200–2,200 sq. ft. | Chimney Diameter | 6" or 8" |
| Max. Heat Output* | 79,000 BTUs/hr. | Approximate Weight | 560 lbs. |
| Max. Burn Times* | 7–11 hrs. | | |



Elite™ E260 shown with nickel-plated Traditional door and side mirror frames, plain glass, nickel-plated blower, black surround trim and nickel-plated surround screws.



Elite E260 shown with custom metallic brown paint with gold-plated Traditional door and side bay mirrors, diamond-etched glass, gold surround trim, gold-plated blower and gold-plated surround screws. (See your local dealer for custom paint colors.)

"I grew up with a Country wood stove
and today I keep my family warm with a Country...
Thank you!"

— Robin W., Washington

CUSTOMIZE TO YOUR TASTE

STEP 1: INSERT MODEL

Choose the unit that best fits your heating needs.



Striker™ C160
600–1,300 sq. ft.*



Performer™ C210
1,000–1,800 sq. ft.*



Legacy™ C260
1,200–2,200 sq. ft.*



Elite™ E260
1,200–2,200 sq. ft.*



Canyon™ C310
1,600–3,000 sq. ft.*

STEP 2: DOOR STYLE AND FINISH

Choose the door style and finish that is right for you. The Traditional door is available on all models, while the Arch door is available on the Striker C160 and Performer C210 only. Choose from black, 24K gold-plated, brushed gold-plated, nickel-plated, or brushed nickel-plated (Elite E260 available with gold or nickel finish only).



*Traditional door—Available on all models
Black, 24K gold-plated, brushed gold-plated, nickel-plated,
or brushed nickel-plated*



*Arch door—Available on C160 and C210 only
Black, 24K gold-plated, brushed gold-plated, nickel-plated,
or brushed nickel-plated*

STEP 3: ETCHED GLASS (optional)

Opt for standard plain glass or choose from four etched designs – Cattails, Floral, Sails, or Evergreen – available for both Traditional and Arch doors.



Cattails



Floral



Sails



Evergreen

STEP 4: SURROUND AND TRIM (optional)

The surround is required and is used to cover the surrounding fireplace opening for a finished appearance. Four sizes are available; ask your dealer for selection assistance. To customize your surround, choose the surround trim and surround screws that best match your décor.



Black



24K gold



Nickel



Black surround trim screws are standard.
Optional gold- or nickel-plated screws
are available.

STEP 5: BLOWER (optional)

Add an optional variable-speed blower, which will distribute the heat in your living area. This blower has a switch to optimize performance and comfort with the option of thermal activation or manual control. Select from our five choices of finishes: black, 24K gold-plated, brushed gold-plated, nickel-plated or brushed nickel-plated.

All Country™ Collection fireplace inserts may be fitted with an optional variable-speed blower (310 & 260 inserts—225-CFM blower/210 & 160 inserts—160-CFM blower). All blowers come with a 6-foot-long electrical cord.



Black


24K gold-plated

Nickel-plated

**Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.*



ANATOMY OF A COUNTRY™ COLLECTION WOOD INSERT

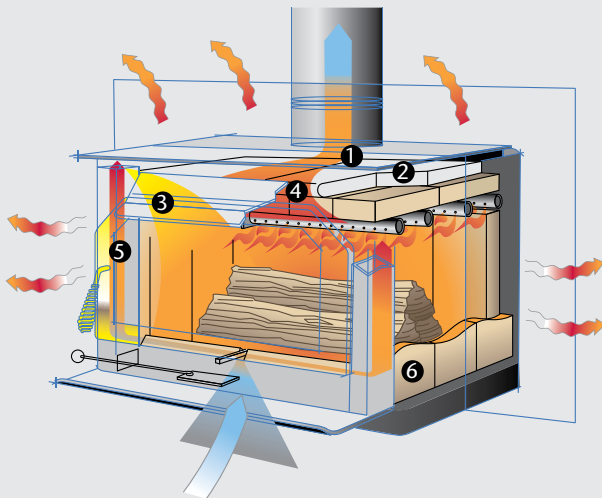

The Country™ Collection name is synonymous with quality products and clean-burning technology. Each Country Collection wood fireplace insert is EPA Phase II-certified and built with an exclusive non-catalytic combustion system that not only burns the wood, but also the smoke, providing clean emissions, a clear viewing window, and extra heat. A unique combination of premium-grade materials, quality craftsmanship, and sophisticated technology ensures that every wood fireplace insert we make will provide you and your family a lifetime of warmth.

“We love the looks, reliability, and warm ambience our new insert provides.”
— Jane S., Massachusetts

STANDARD FEATURES

- 1 Ceramic-Fiber Blanket**
This technology, developed by the engineers at NASA, but introduced to the hearth industry with the Country Collection, has 10 times the insulation value of firebrick. It radiates heat back into the firebox, creating higher efficiencies and cleaner glass.
- 2 Refractory Baffle**
The unique design assists in igniting fuel-rich gases, increasing efficiency and reducing emissions.
- 3 Integral Airwash System**
Preheated primary combustion air enters the firebox and sweeps across the viewing glass, keeping the glass clean and clear for less maintenance and a wide-open view of the fire.
- 4 Secondary Combustion**
Stainless steel afterburner tubes mix oxygen with unburned gases and smoke to create a secondary burn, providing clean emissions and utilizing a previously wasted fuel source. By igniting those gases, your fireplace insert will get more heat out of every log, and help keep your fuel costs low.
- 5 Heavy-Duty Door**
The beauty of this feature lies in its simplicity. The machined door handle has no nuts or washers to loosen or wear, and the glass is sandwiched between the two-piece, cast-iron door, forming a 360° seal that will last for years.
- 6 Premium Materials**
The exterior of every fireplace insert is made from heavy-gauge steel and all critical parts inside the firebox are made of stainless steel for long service life.

LIMITED LIFETIME WARRANTY

We are proud to stand behind our fireplace inserts and we prove it by offering a Limited Lifetime Warranty.

DIMENSIONS

| | STRIKER™ C160 | PERFORMER™ C210 | LEGACY™ C260 | ELITE™ E260 | CANYON™ C310 |
|-------------------------------|--------------------|-----------------|--------------|-------------|--------------|
| Front Width | 23-1/8" | 25" | 28" | 48" | 28" |
| Rear Width {Rear Taper Width} | 23-1/2" {21-1/2"}* | 25-1/2" {23"}* | 28-1/2"** | 28-1/2"** | 28-1/2"** |
| Front Height | 18-1/2" | 18" | 20-1/2" | 21-5/8" | 20-1/2" |
| Rear Height | 19-1/4" | 19" | 22-1/2" | 22-1/2" | 22-1/2" |
| Depth into Fireplace | 12-1/2" | 12-1/4" | 14-1/2" | 14-1/2" | 14-1/2" |
| Flue Diameter (NOTE 1) | 6" | 6" | 6" or 8" | 6" or 8" | 6" or 8" |
| F = Depth onto Hearth | 4-1/2" | 9" | 6-1/2" | 6-1/2" | 9" |
| Approximate Weight | 320 lbs. | 400 lbs. | 493 lbs. | 560 lbs. | 547 lbs. |

NOTE 1: Consult your dealer or professional installer for recommended chimney sizes for your application. C260, E260 and C310 require 6" reducer for use with 6" chimney. *Leveling nuts extend outside this dimension.

CLEARANCES

| | STRIKER C160 | PERFORMER C210 | LEGACY C260 | ELITE E260 | CANYON C310 |
|--|--------------|----------------|-------------|------------|-------------|
| A = Insert Top to Combustible Mantel** (US) | 24" | 24" | 30" | 23" | 30" |
| Insert Top to Combustible Mantel** (CANADA) | 26" | 32" | 30" | 23" | 31" |
| B = Insert Top to Top Facing** (US) | 15" | 18" | 20" | 17" | 20" |
| Insert Top to Top Facing** (CANADA) | 18" | 26" | 20" | 17" | 23" |
| C = Insert Side to Side Facing** | 12" | 15" | 15" | 4" | 15" |
| D = Insert Side to Side Wall** | 20" | 18" | 20" | 9" | 20" |
| E = Hearth in front of Insert (NOTE 2) | 18" | 18" | 22" | 22" | 22" |
| K = Hearth Side to Door Opening | 8" | 8" | 8" | 8" | 8" |
| G = Minimum Mantel Height from Bottom of Insert | 42-1/2" | 42" | 50-1/2" | 45" | 50-1/2" |



FIREPLACE SIZING

| | STRIKER C160 | PERFORMER C210 | LEGACY C260 | ELITE E260 | CANYON C310 |
|---|-----------------|-----------------|-------------|------------|-------------|
| H = Minimum Depth | 12-3/4" | 12-1/2" | 14-3/4" | 14-3/4" | 14-3/4" |
| I = Minimum Height {ZC = Zero-Clearance} | 19-1/2" {21"ZC} | 19-1/4" {21"ZC} | 22-3/4" | 22-3/4" | 22-3/4" |
| Minimum Width {ZC = Zero-Clearance} | 25-1/2" {36"ZC} | 26" {36"ZC} | 30-1/2" | 30-1/2" | 30-1/2" |
| J = Maximum Lintel Depth (w/out use of adjustable offset box) | 4-3/4" | 4-1/2" | 5-1/4" | 5-3/4" | 5-1/4" |

SURROUND SIZING

| | STRIKER C160 | PERFORMER C210 | LEGACY C260 | ELITE E260 | CANYON C310 |
|---------------|-----------------|-----------------|-------------|-------------|-------------|
| Surround Size | 26-1/2"H x 40"W | 26-1/2"H x 40"W | 29"H x 40"W | 29"H x 48"W | 29"H x 40"W |
| | 26-1/2"H x 48"W | 26-1/2"H x 48"W | 29"H x 48"W | N/A | 29"H x 48"W |
| | 30-1/2"H x 40"W | 30-1/2"H x 40"W | 33"H x 40"W | 32"H x 48"W | 33"H x 40"W |
| | 30-1/2"H x 48"W | 30-1/2"H x 48"W | 33"H x 48"W | N/A | 33"H x 48"W |

NOTE 2: Hearth depth in front of insert may be reduced by 2" for every 2" the hearth is raised.

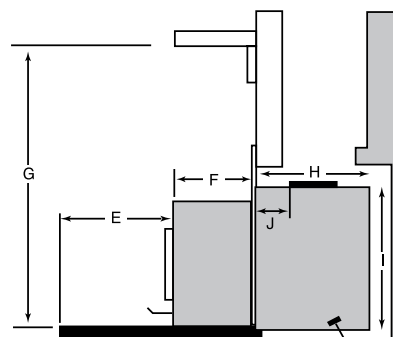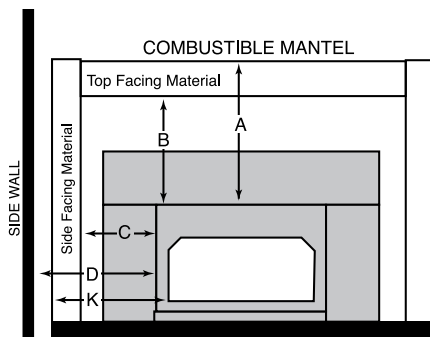

**Reductions may be available for A, B, C, & D dimensions. See owner's manual or ask your dealer. Shielding must be used.

NOTE: Combustible material projecting more than 3/4" from wall above or beside the insert shall be considered mantel or sidewall.

Zero-Clearance Factory-Built Fireplace Approval
C160 and C210: Approved for installation into the following factory-built wood-burning fireplaces—Heatilator, Majestic, Superior, Martin, Preway, Marco, Temco and FMI with a minimum of 36 inches in width at cavity opening and 21 inches of height. Refer to owner's manuals for more details.

Chimney Requirements
C160 and C210: Installation in a zero-clearance factory-built wood-burning fireplace requires a stainless extension from the flue outlet fully into the chimney of the fireplace. A full-length liner is recommended for optimum performance and safety.

All Inserts: Approved with or without positive flue connection in masonry fireplaces (excluding Canada). For maximum safety and performance we recommend full-length stainless steel chimney liners, especially in factory-built fireplaces. Ask your dealer or professional installer for the recommended chimney size to use for your application.

PRODUCTS AND DEALERS YOU CAN COUNT ON

Lennox is committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is as important as choosing the right brand, and our dealers are a big reason why you can count on quality customer service when you call.

LENNOX

HEARTH PRODUCTS

© Lennox Industries Inc. 2011

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.

785207M 02/11

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



100% recycled