



Elegance, warmth and efficiency come together in this versatile gas fireplace insert available with a variety of faces to suit any style.

LENNOX

HEARTH PRODUCTS

ELITE® SERIES



Ravenna™ shown with Foundry face, Standard surround and Architectural Stone liner.

■ The hearth is the center of the home. Nothing draws family and friends together like the slow dance and radiant warmth of a fire. The Ravenna™ direct-vent gas insert offers the convenience of gas, the look of a real wood fire and a variety of face options to enhance any décor. The Ravenna is available in two heating capacities—33,000 or 40,000 BTUs—to meet your unique home heating needs. Approved to fit most zero-clearance factory-built and masonry fireplaces, the Ravenna fireplace insert turns your standard fireplace into a cost-effective heat source and warm, beautiful gathering place. ■

ARCH FACE



Ravenna™ shown with Brushed Nickel Arch face, Black Nickel Aspen insets, Standard surround and Architectural Stone liner.

The Arch face, with its soft curve, creates the perfect frame for a dancing fire. A variety of finishes and insets allows you to customize your insert to fit your unique home and lifestyle. Choose from four different finishes (Gold, Brushed Nickel, Black Nickel and Black) and four different insets (Aspen™, Napa™, Pacific™ and Tuscan™) to build the perfect face for your décor.

INSET DESIGNS



Aspen™



Napa™



Pacific™



Tuscan™



AVAILABLE FINISHES



Gold

Brushed Nickel

Black Nickel

Black

SCREEN FACE



Ravenna™ shown with Screen face and Standard surround.

The Screen face has a clean aesthetic, accented with soft curves and a screen to diffuse the light of the dancing flames. The understated design of the face allows it to fit naturally into almost any style of home. With subtle elegance, the Screen face brings the timeless appeal of an open wood-burning fireplace to your home and provides a barrier to prevent direct contact with the hot glass surface.



Note: The Screen face may be used with or without a surround (see dealer for details).

TRADITIONAL FACE



Ravenna™ shown with Black Traditional face, Standard surround and Architectural Stone liner.

The clean, understated lines of the Traditional face complement any room and any décor. Choose from three different finishes to achieve the perfect look.

AVAILABLE FINISHES



Gold



Brushed Nickel



Black

FOUNDRY™ FACE




Ravenna shown with Foundry face, Standard surround and Architectural Stone liner.

The Foundry™ face, with its hand-hammered Black Nickel straps, provides a rustic elegance to any home. Each face is individually crafted and forged by hand, making it a truly unique piece. The Foundry is more than a face—it is a work of art that will be enjoyed for years to come.



Note: The Foundry™ face may be used with or without a surround (see dealer for details).

CAST PILLAR FACE

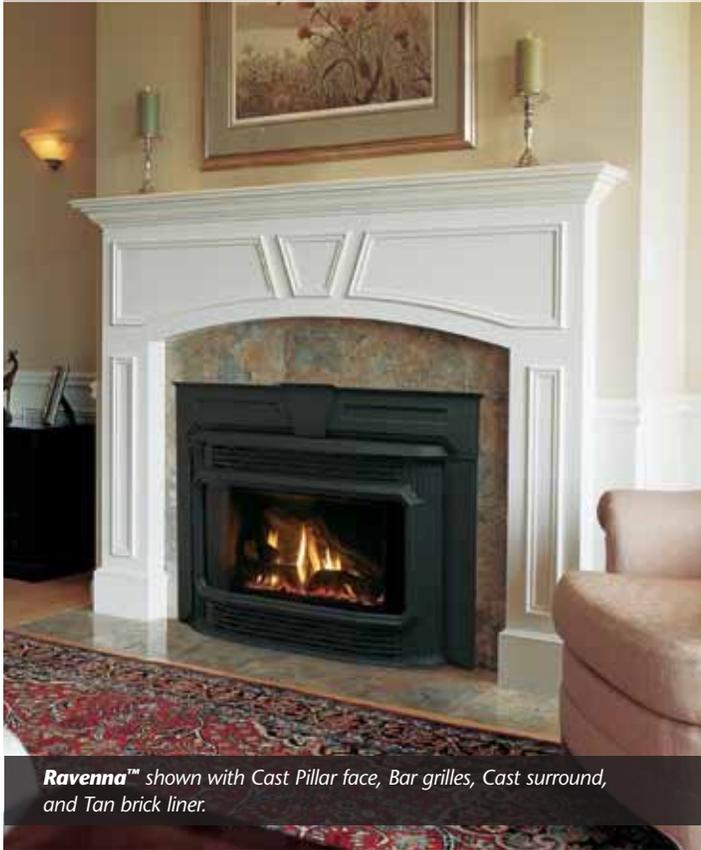

Ravenna™ shown with Cast Pillar face, Bar grilles, Cast surround, and Tan brick liner.

Few materials provide the strength and elegance of cast iron. The Cast Pillar face, with delicate Filigree grilles or with the more contemporary Bar grilles, will complement and anchor any room. The dimension and beauty of a cast face and a large bay window combine to create a striking piece of architecture for your home.




Cast Pillar face with Bar grilles



Cast Pillar face with Filigree grilles

CONTEMPORARY FACE

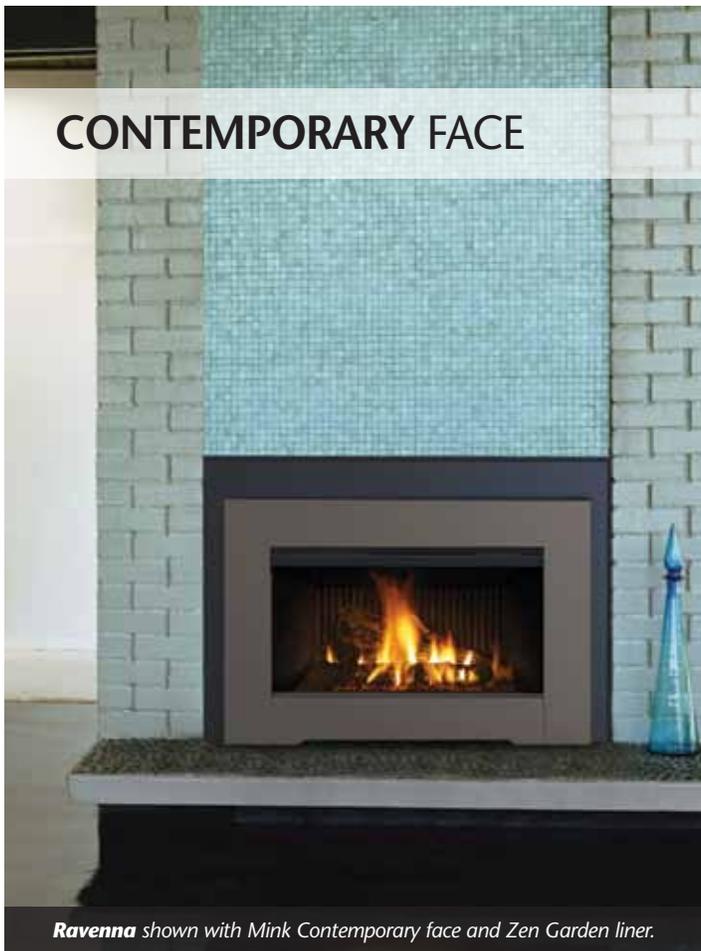


Ravenna shown with Mink Contemporary face and Zen Garden liner.

For homeowners who prefer a more modern look and feel, the steel-constructed Contemporary face provides an ideal option. By eliminating the grilles, the clean lines keep the focus on the dancing flames and glowing embers. The sleek design and minimalist presentation, available in Black and Mink, are also pleasantly versatile to integrate with a variety of today's style trends.



Contemporary face

AVAILABLE FINISHES



Black

Mink

CUSTOMIZE TO YOUR TASTE

STEP 1: BTU LEVEL

Match the area you want to heat with the BTUs required.



RAVENNA™ DIRECT-VENT

33,000 BTUs 500–1,500 SQ. FT.*	40,000 BTUs 900–2,000 SQ. FT.*
--	--

STEP 2: FACE

Choose your face and finish.

A) Arch



Aspen™



Napa™



Pacific™



Tuscan™



Choose your face color and choose your inset color. All faces and insets available in Black, Brushed Nickel, Black Nickel and Gold.

B) Traditional



Gold

Brushed Nickel

Black

C) Screen**



D) Foundry™



E) Cast Pillar



Cast Pillar face with Filigree grilles



Cast Pillar face with Bar grilles

F) Contemporary



Black finish



Mink finish

STEP 3: LINER (required)

Choose a brick liner to customize your insert.



Tan brick



Red brick




Architectural Stone



Zen Garden

STEP 4: SURROUND AND TRIM

Choose your surround and trim.



Standard surround



Cast surround
Available for use with
Cast Pillar face only

Trim



Black
(Standard)



Nickel
(Option)



Gold
(Option)

STEP 5: THERMOSTAT (optional)

Adjust the comfort level of your room with a convenient wall-mounted thermostat or a versatile remote thermostat.



	UNIT-MOUNTED CONTROLS	WIRELESS REMOTE	TCC WIRELESS REMOTE
MANUAL ON/OFF	●	●	●
REMOTE ON/OFF		●	●
BURNER CONTROL	MANUAL	MANUAL	REMOTE
BLOWER CONTROL	MANUAL	MANUAL	REMOTE
REMOTE THERMOSTAT		●	●
SMART CONTROL			●


*Square-foot heating capacities are approximations only. Local conditions such as elevation, wind, vent configuration and choice of fuels will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

**Provides a barrier to prevent direct contact with the hot glass surface.



From the convenience of your sofa, you can use your Total Comfort Control™ remote to adjust the room temperature around the exact area where you are relaxing. Six heat and blower settings give you precise control to efficiently heat the space around you.

Fireplaces balance aesthetics with heat. While a large flame is pleasing, it can quickly overheat the room. If you turn it off, you lose the enjoyment of the flame. The smart setting on your Total Comfort Control remote conserves fuel by automatically lowering flame height as the room approaches the desired temperature, so you don't have to make continuous adjustments.



STANDARD FEATURES

Variety of faces and finishes available to complement a broad range of architectural styles

Electronic ignition system with battery backup—still ignites and heats during a power outage

High-detail log set and realistic fireplace depth

State-of-the-art burn technology provides the flame appearance of an authentic wood-burning fire

One-touch On/Off switch for easy operation

Temperature-activated 155-CFM blower to circulate warmth in your home

Heavy, 14-gauge aluminized steel firebox construction for years of reliable operation

Approved for zero-clearance (metal) and masonry fireplaces

Easy-access controls with hinged door and labeled controls

Limited Lifetime Warranty

Backed by the Good Housekeeping Seal

OPTIONAL ACCESSORIES

Wireless On/Off remote with integrated thermostat


Wireless Total Comfort Control remote system

Propane conversion kit

RAVENNA™ DIMENSIONS



A	FRONT WIDTH	31-1/4"
B	OVERALL UNIT HEIGHT TO TOP OF 3" FLUE COLLAR	19-3/8"
C	UNIT DEPTH	15-7/8"
D	REAR HEIGHT TO CENTERLINE OF 3" FLUE COLLAR	18-1/2"
E	DEPTH TO CENTERLINE OF 3" FLUE COLLAR	13-3/8"

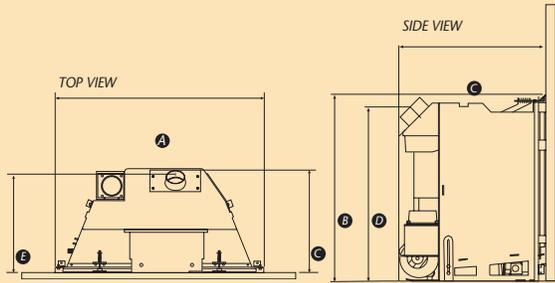

SPECIFICATIONS

RAVENNA™ 33 DIRECT-VENT GAS INSERT

HEATING CAPACITY*	500–1,500 SQ. FT.	
INSERT WEIGHT	151 LBS.	
BTU INPUT	NATURAL GAS	HIGH 33,000 / LOW 24,000
	LP GAS (PROPANE)	HIGH 33,000 / LOW 24,000
CANADIAN ENERGIDE	NATURAL GAS	65.55%
RATING	LP GAS (PROPANE)	67.80%
STEADY-STATE EFFICIENCY**	83%–86%	
BLOWER	155-CFM VARIABLE-SPEED BLOWER (STANDARD)	
	VENT PIPE	
COLINEAR 3" FLEX VENT		


RAVENNA™ 40 DIRECT-VENT GAS INSERT

HEATING CAPACITY*	900–2,000 SQ. FT.	
INSERT WEIGHT	151 LBS.	
BTU INPUT	NATURAL GAS	HIGH 40,000 / LOW 28,000
	LP GAS (PROPANE)	HIGH 37,500 / LOW 26,000
CANADIAN ENERGIDE	NATURAL GAS	67.17%
RATING	LP GAS (PROPANE)	69.07%
STEADY-STATE EFFICIENCY**	83%–86%	
BLOWER	155-CFM VARIABLE-SPEED BLOWER (STANDARD)	
	VENT PIPE	
COLINEAR 3" FLEX VENT		

NOTE: The Ravenna 33/40 gas insert is shipped as a 40,000-BTU unit. An optional kit enables field conversion to 33,000-BTU. There is only one insert model number.

*Square-foot heating capacities are approximations only. Local conditions such as elevation, wind, vent configuration and choice of fuels will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.
**Efficiency varies slightly with various pipe configurations.

CLEARANCES

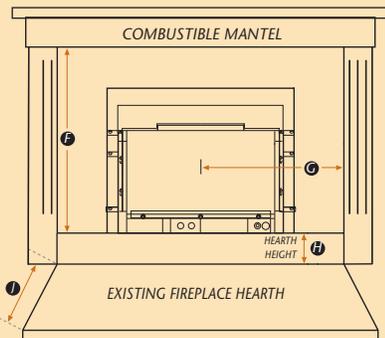

	RAVENNA 33	RAVENNA 40
F	31-1/2"	35-1/2"
G	25-1/2"	25-1/2"

	RAVENNA 33		RAVENNA 40	
H	0"	2" 4"	0"	2" 4"
J	13"	10" 0"	14"	10" 0"

Hearth protection to be min. 3/8" (10mm)-thick non-combustible or equivalent, with a k factor of .84.

INSERT SURROUNDS

Traditional surround ships with black trim. Gold or nickel surround trim kits available.

STANDARD SURROUND (THREE PIECES)	STANDARD SURROUND (ONE PIECE)	CAST SURROUND
29"H x 41"W	29"H x 41"W	
29"H x 48"W		
33"H x 41"W		
33"H x 48"W		30"H x 45-1/2"W

MINIMUM FIREPLACE OPENING

	RAVENNA
FRONT WIDTH	31-1/2"
HEIGHT	19-1/2"
REAR WIDTH	18"
DEPTH	16"



EnerChoice designation applies to Ravenna fireplace insert.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

LENNOX
HEARTH PRODUCTS

© Lennox Industries Inc. 2011

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.

