



Warmth and style come together in a sleek gas fireplace insert that will transform a standard fireplace into a classy focal point for your home.

LENNOX
HEARTH PRODUCTS

ELITE® SERIES



■ Nothing draws family and friends together like the slow dance and radiant warmth of a fire. The Ravenna™ CD direct-vent fireplace insert offers the convenience of gas, sleek contemporary styling, and efficient home heating. The Ravenna CD insert transforms your standard fireplace into a cost-effective heat source and warm, beautiful gathering place. ■

STANDARD FEATURES

Variety of face and media options available to complement your particular taste

State-of-the-art burn technology provides a vibrant flame that brings warmth and ambiance to the room

Total Comfort Control™ remote thermostat system

Remote controlled, variable-speed 155-CFM blower to circulate warmth in your home

Stylish reflective porcelain firebox liners that fill the firebox with the warm glow of the flame

Operates without power—still heats during a power outage

Approved for zero-clearance (metal) and masonry fireplaces

Heavy, 14-gauge aluminized steel firebox construction

Limited Lifetime Warranty

OPTIONAL ACCESSORIES

Propane conversion kit

Barrier screen




Reflective porcelain panels



From the convenience of your sofa, you can use your Total Comfort Control™ remote to adjust the room temperature around the exact area where you are relaxing. Six heat and blower settings give you precise control to efficiently heat the space around you.

The Ravenna™ CD balances aesthetics with heat. While a large flame is pleasing, it can quickly overheat the room. If you turn it off, you lose the enjoyment of the flame. The SMART setting on your Total Comfort Control remote conserves fuel by automatically lowering flame height as the room approaches the desired temperature, so you don't have to make continuous adjustments.



CUSTOMIZE TO YOUR TASTE

FACE

Choose your finish.



Black finish



Mink finish

MEDIA

Select from five glass media options to suit your taste or to complement home décor.



Reflective Blue



Goldfinger



Reflective Black



Platinum




Copper


RAVENNA™ CD DIMENSIONS



A	FRONT WIDTH	31-1/4"
B	OVERALL UNIT HEIGHT TO TOP OF 3" FLUE COLLAR	19-3/8"
C	UNIT DEPTH	15-7/8"
D	REAR HEIGHT TO CENTERLINE OF 3" FLUE COLLAR	18-1/2"
E	DEPTH TO CENTERLINE OF 3" FLUE COLLAR	13-3/8"

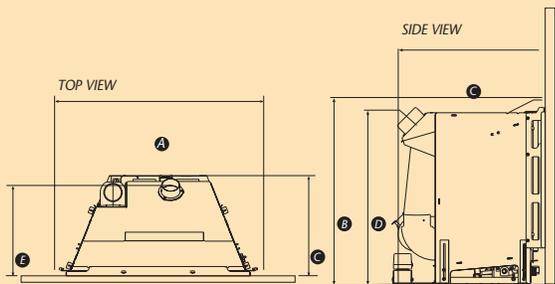

CLEARANCES

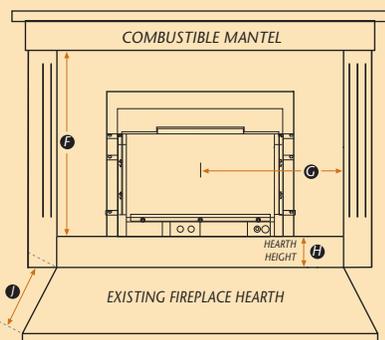

RAVENNA CD	
F	35-1/2"
G	25-1/2"

RAVENNA CD	
H	0" 2" 4"
J	14" 10" 0"

Hearth protection to be min. 3/8" (10mm)-thick non-combustible or equivalent, with a k factor of .84.

SPECIFICATIONS

RAVENNA™ CD DIRECT-VENT GAS INSERT

HEATING CAPACITY*	500–1,500 SQ. FT.	
INSERT WEIGHT	151 LBS.	
BTU INPUT	NATURAL GAS	HIGH 32,000 / LOW 21,000
	LP GAS (PROPANE)	HIGH 27,000 / LOW 21,000
CANADIAN ENERGYGUIDE RATING	NATURAL GAS	69.20%
	LP GAS (PROPANE)	67.28%
STEADY-STATE EFFICIENCY**	83%–86%	
BLOWER	155-CFM VARIABLE-SPEED BLOWER (STANDARD)	
VENT PIPE	COLINEAR 3" FLEX VENT	

*Square-foot heating capacities are approximations only. Local conditions such as elevation, wind, vent configuration and choice of fuels will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

**Efficiency varies slightly with various pipe configurations.

INSERT SURROUNDS

STANDARD SURROUND (THREE PIECES)

29"H x 41"W
29"H x 48"W
33"H x 41"W
33"H x 48"W

STANDARD SURROUND (ONE PIECE)

29"H x 41"W

Traditional surround ships with black trim. Gold or nickel surround trim kits available.


MINIMUM FIREPLACE OPENING

FRONT WIDTH	31-1/2"
HEIGHT	19-1/2"
REAR WIDTH	18"
DEPTH	16"

LENNOX
HEARTH PRODUCTS

©Lennox Hearth Products LLC 2012
Visit us at www.lennoxhearthproducts.com
or contact us at 1-800-655-2008

785333M 08/12



IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuation without notice.



OMN-Test Laboratories, Inc.