





Madison Park™ MPI27 / MPI27CD

Appliance Specifications

DIRECT-VENT FIREPLACE INSERT

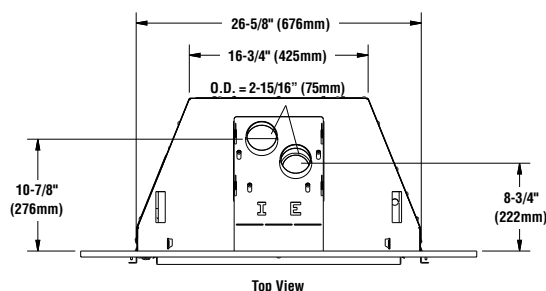

Input (BTU) - Electronic Models		
Fuel	MPI27	MPI27CD
	Input Rate (BTU / HR)	
Nat. Gas	Hi 30,000	Hi 30,000
	Lo 21,000	Lo 21,000
LP Gas	Hi 25,000	Hi 25,000
	Lo 20,000	Lo 20,000

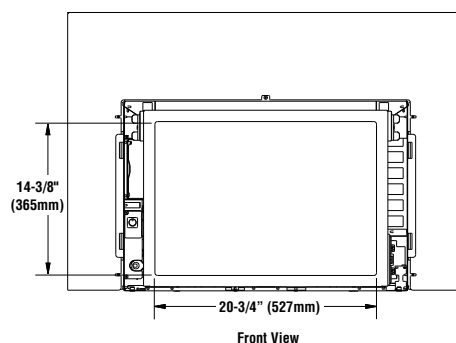

Left Side View

Front View

Right Side View


MINIMUM FIREPLACE SIZES REQUIRED	MPI27/MPI27CD
Front Opening.....	27" (686mm)
Height.....	18" (457mm)
Rear Width.....	17" (432mm)
Depth.....	15" (381mm)

MINIMUM CLEARANCES TO COMBUSTIBLES	
A = 1-1/2" (38mm) Top Facing to Bottom of Appliance	32" (813mm)
B = Side Wall	9-1/2" (241mm)
*C = 6" (152mm) Mantel to Bottom of Appliance	34" (864mm)

HEARTH PROTECTION	
D = Vertical Distance from base of appliance.....	0" 4"
to Hearth Extension.....	(0mm) (102mm)
E = Minimum Horizontal Distance.....	10" 0"
from Front of Appliance.....	(254mm) (0mm)

*See owner's manual for additional mantel clearances and options.



MINIMUM CLEARANCES



Note: Hearth protection to be min. 1/2" (13mm) thick non-combustible or equivalent, with a k factor of .84.



14-098



Efficiency		
	Natural Gas	Propane Gas
AFUE	MPI27 - 67% MPI27CD - 67%	MPI27 - 70% MPI27CD - 69%
EnerGuide P4	MPI27 - 68% MPI27CD - 66%	MPI27 - 71% MPI27CD - 68%

This appliance has been tested and certified to ANSI Z21.88/CSA 2.33 Standard for Vented Gas Fireplace Heater and CAN/CGA 2.17-M91 and UL 307B Gas Burning Heating Appliances for Manufactured (Mobile) Homes in both USA and Canada.

NOTE: Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Madison Park™ MPI27 / MPI27CD

Product Reference Information			
Cat. No.	Description	Ship. Weight	Ship. Volume
H9122	MPI27, Madison Park™ 27, Small Insert	87.5 lb.	12.22 cu. ft.
H9123	MPI27CD, Madison Park Contemp 27, Small Insert	80lb.	12.22 cu. ft.

Vent Kits

Simpson Dura Vent -

Flex Liner 3" X 35' - #3DFA-35

Adaptor w/ Flashing - #46DVA-GK

Termination Cap - #46DVA-VCH With #460 DVA-VWG

Termination Cap - #460DVA-VC

Co-Linear Kit w/ 3" X 35' Flex Liner (Intake and Exhaust), Adaptor, Flashing and Termination Cap - #46DVA-CL33

Firebox Liner Kits - One Required

Champagne
Merlot
Black Porcelain
Black Painted

Facade Kits - One Required

Contemporary
Santa Fe
Artisan

Surround Kits - One Required

3 Sided (37" W x 26" H, 44" W x 26" H, 37" W x 30" H,
41" W x 30" H)
4 Sided - Trimmable (46" W x 38" H)

Glass Media Kits (MPI27CD only)

Blue Glass Media
Black Glass Media
Smoke Glass Media
Amber Gold Glass Media
White Glass Media

Options

Typical Installation

The existing fireplace chimneys may take various contours which the flexible liners will accommodate. However, keep the flexible liner STRAIGHT and avoid bending. When at maximum vertical height, standing pilot should be used for correct operation.

Liner Requirements:


Use 3" (76 mm) diameter listed gas vent liner (UL1777 ONLY) for the EXHAUST

Use 3" (76 mm) diameter listed liner (UL 181 or UL1777) for the AIR INTAKE.

Vertical Height Min. = 10 ft. (3.1 M)
Vertical height Max. = 25 ft. (7.6 M)

NOTE: Measured from base on unit to the end of the vent pipe or liner

The flexible vent pipe must NOT be allowed to sag behind insert or in fireplace flue.

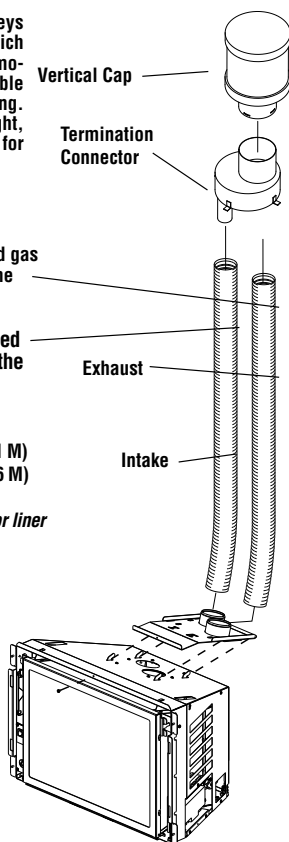

Standard Features

- Standard full-featured remote.
- Electronic ignition with optional continuous pilot mode.
- Battery back-up in case of power outage
- Standard 150-CFM variable-speed blower delivers warm, consistent heat