


THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.VALCOURTINC.COM.

APPLIANCE DIMENSIONS		FRAMING DIMENSIONS
<p style="text-align: center;">6" (152 mm) FORCED AIR KIT (3)</p>	<p style="text-align: center;">4" (102 mm) FRESH AIR INLET (1)</p>	
<p style="text-align: center;">8" (203 mm) GRAVITY KIT (2)</p>	<p style="text-align: center;">ELEC. INLET (1)</p>	
CORNER INSTALLATION		
LEGEND		
<p>Combustible material allowed in this area</p>	<p>Non-combustible material only in this area</p>	


* Where applicable, add 6" for fresh air pipe and/or 10" for forced air pipe to the width of the chase. When drywall panels or any other finishing material inside the chase around the fireplace is to be used, add its thickness to the measurement.

THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.VALCOURTINC.COM.

FACING MATERIAL

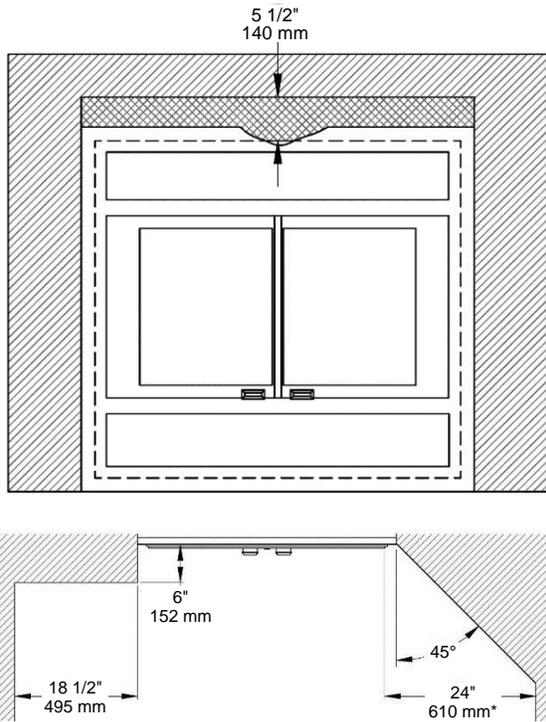


SHELF, MANTLE, AND WALL PROJECTION

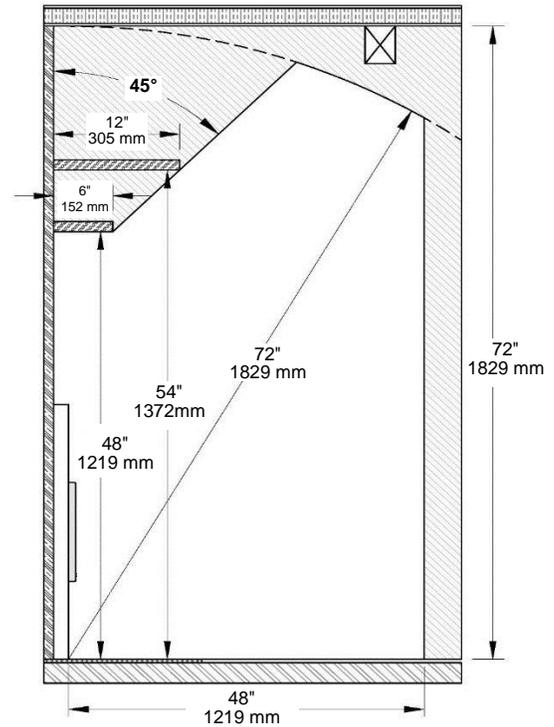

*The 24" (610 mm) minimum clearance is from door opening.

HEARTH EXTENSION CONSTRUCTION AND DIMENSIONS

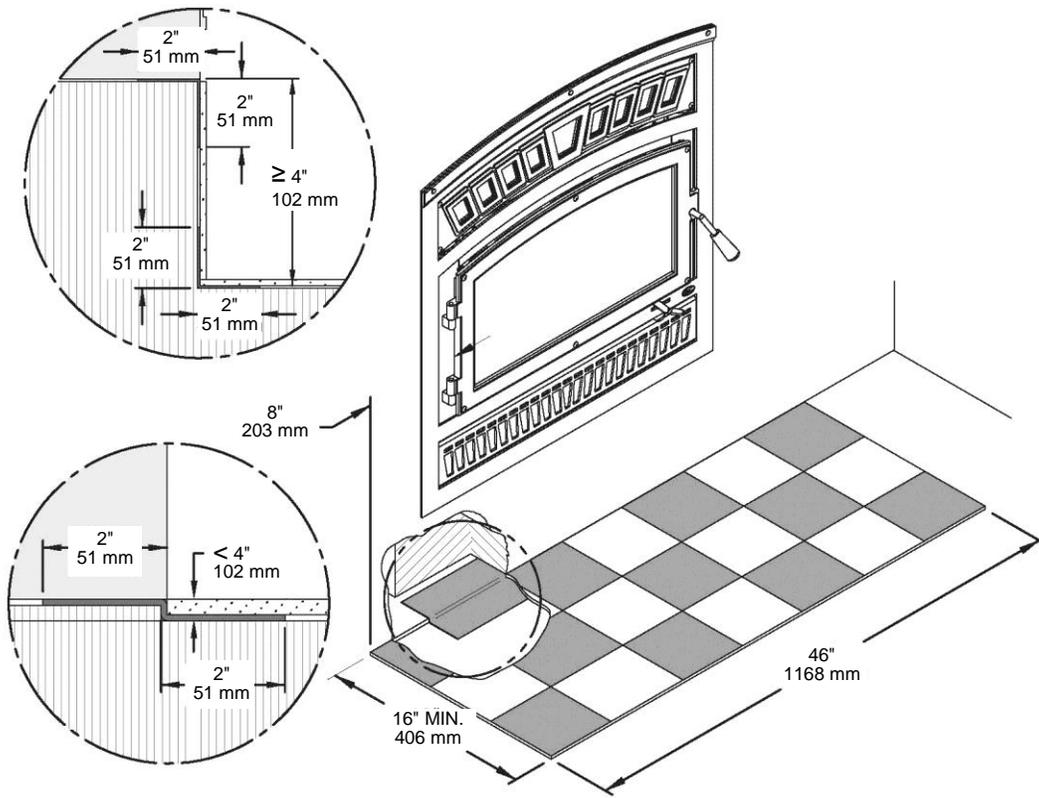

LEGEND

Combustible material allowed in this area



Non-combustible material only in this area

