



**GLASS VIEWING AREA**





36" W x 20-1/4" H

**TECHNICAL INFORMATION**

- Max. Btu Input: Up to 100,000 BTU/HR
- Area Heated: Up to 2,500 sq. ft.
- EPA Emissions Rating (g/h, catalytic): 2.4
- Fuel Capacity: 40lbs. (18kg)
- Loading: Front
- Fireplace weight: 741lbs.
- Primary Air Control: Manual
- Glass panel: High-temperature ceramic
- Flue exit position: Top
- Blower rating: 160 cfm (115V, 60Hz)
- EPA Phase II Certified & Washington State Certified

**FIELD INSTALLED ACCESSORIES**

- Optional Face Kits (one required):
  - EWF36CFTK cast iron face kit (totally covers face of unit) with grills in Classic Black
  - EWF36CLK latticed cast iron grills (top and bottom) in Classic Black
  - Fan Kit: FK26
  - Sparkscreen: EWF36S

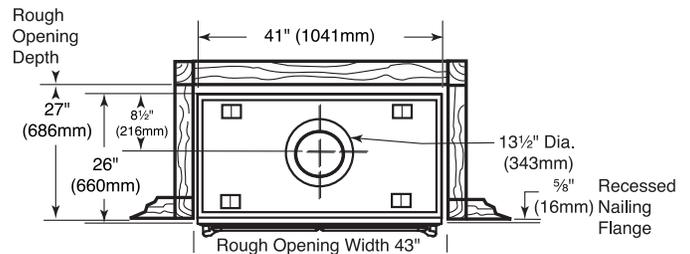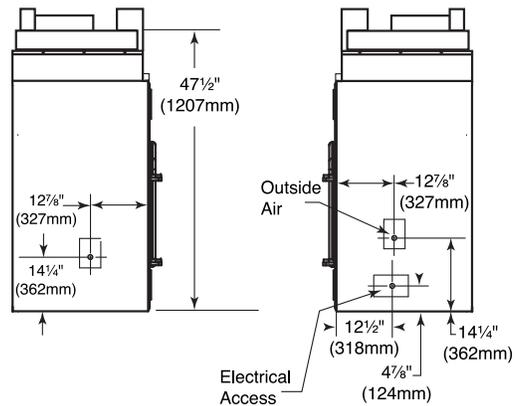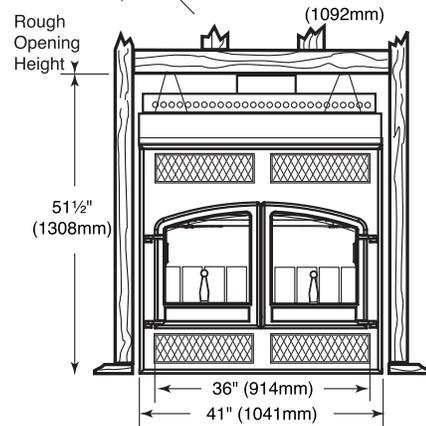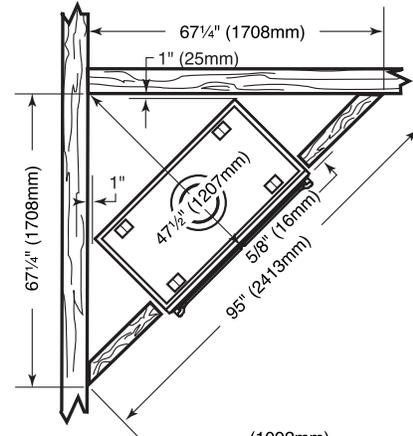

A Brand of Monessen Hearth Systems Co.  
149 Cleveland Drive, Paris, Kentucky 40361  
[www.vermontcastings.com](http://www.vermontcastings.com)

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.