



PRODUCT SPECIFICATIONS
Stratton Wood Burning Fireplace



GLASS VIEWING AREA

22-1/4" W X 13" H (280 sq.in.)

TECHNICAL INFORMATION

Burn rate: 10,100 - 27,500 BTUs/hr.

Max BTUs: 40,000

Thermal Efficiency: 68%

Dimensions (Actual): 35.25" W x 36.16" H x 22.21" D

Dimensions (Framing): 36.5" W x 36.6" H x 23" D

Area Heated: 1,500 sq. ft.

Firebox Size (cubic ft.): 2.1

Emission (Grams/Hr): 3

Log length: 18" to 20"

Removable internal baffle

Uses SK8 chimney or triple wall pipe with TWABR adapter





Design Certified: OMNI

FIELD INSTALLED ACCESSORIES

Heat Activated Fan Kit (FK26STRAT)

FACE KIT (REQUIRED)

Stratton Circa Front in Black Texture (STRATCIRCB)

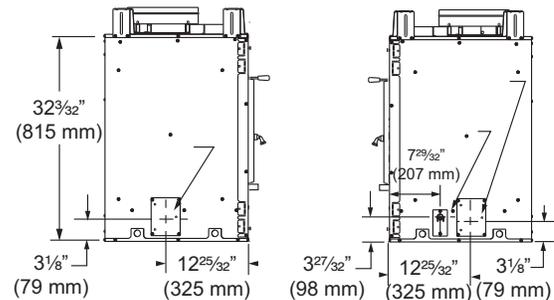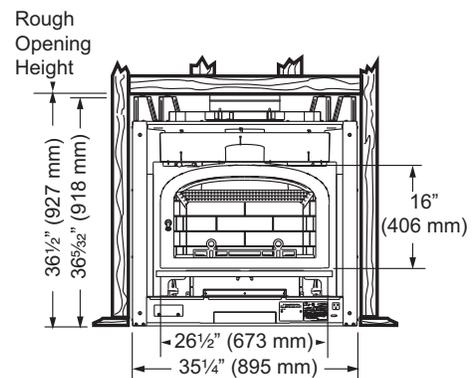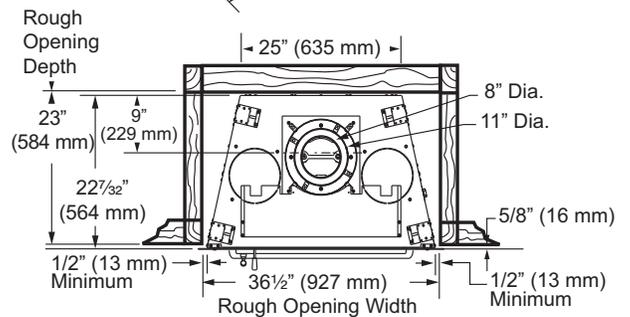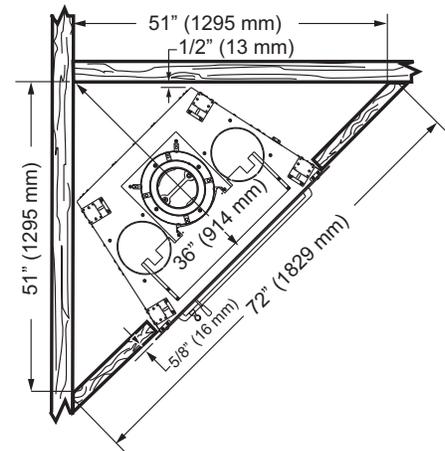

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.vermontcastings.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2010 Monessen Hearth Systems Co.