




Walltherm detail information

Clearance requirements

Clearance requirements in the U.S. and Canada for standard parallel and corner freestanding installations:




Standard residential installation with single wall connector

- | | |
|--------------------------|----------------|
| A. Sidewall to appliance | 10.0" (254 mm) |
| B. Backwall to appliance | 10.0" (254 mm) |
| C. Sidewall to connector | 17.0" (432 mm) |
| D. Backwall to connector | 13.5" (330 mm) |


Walltherm dimensions

Dimension Walltherm,
mod Königsspitze:


Front view:

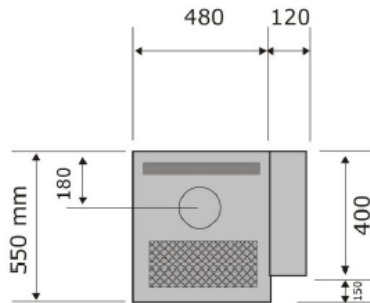


top view:

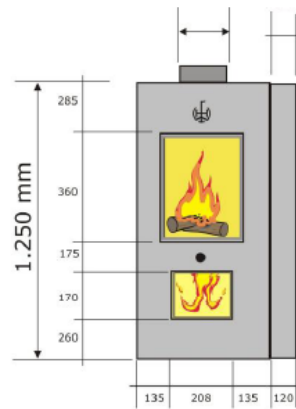

side view (right)

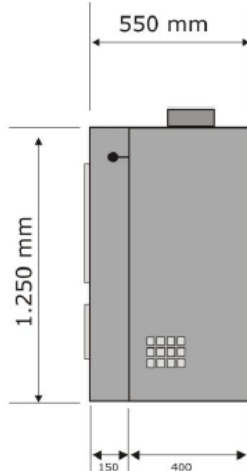

Hydraulic connections:

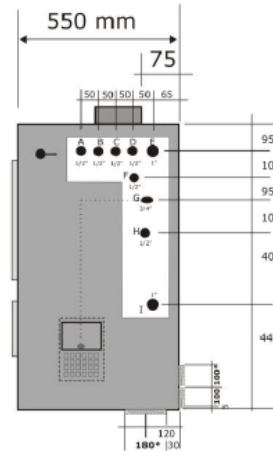

*Info: The external air inlet can be connected on the back side or on the bottom.

How it works

