

# Legacy™ Model C260T-B



## Appliance Specifications - Masonry Wood Fireplace Insert

Product Reference Information			
Cat. No.	Model	Ship. Weight	Ship. Volume
H7893	C260T-B, Traditional black door, nickel nameplate	516 lb.s	18.3 cu. ft.



Insert

### C260

- Chimney Diameter 8" (203 mm), optional 6" (152mm)\*
- Log Length 22-1/2" Max./20" Recommended
- Firebox 22-1/2"W x 17-1/2"D
- DEQ Efficiency 68.2%
- Heating Capacity\* 1,200-2,200 sq. ft
- Max. Heat Output\* 79,000 BTUs/hr.
- Max. Burn Times\* 7-11 hrs.
- \* Requires P/N 71134 Pipe Reducer (8" to 6")

### C260 Dimensions

- Insert Front Width 28"
- Insert Front Height 20-1/2"
- Rear Width 28-1/2"
- Rear Height 22-1/2"

### Optional Accessories

- Surround Panel Kits - Various sizes offered, 29" x 40", 29" x 48", 33" x 40", 33" x 48" - trim available in black, gold or nickel.
- Faceplates - black, gold, brushed gold, nickel or brushed nickel.
- Pipe Reducer from 8" to 6" stainless
- Positive Flue Connector Ring Kit - 8"
- Handles - gold, brushed gold, nickel or brushed nickel
- Thermal Activated Blowers (225-CFM) - black, gold, nickel, brushed nickel or brushed gold.

The Legacy™ Model C260 inserts are safety listed with the following agency:

- Listing Agency: PFS Corporation. Listed to UL 1482, ULC S628

Listing



Report No. 14-184

EPA certification test emission value 4.1 g/hr per 2015 standard

Options

### NOTES:

- Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
- Dimensions shown are approximations only (+/- 1/4")
- Square-foot heating capacities are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Notes



# Legacy™ Model C260T-B

## Hearth Protection

The hearth and/or floor protection must be a thermally rated non-combustible hearth/floor protector meeting or exceeding a thermal rating of  $k=0.84$  or equivalent with a listed thickness of listed thickness of 3/4" (19mm) minimum in the USA and Canada. The covering must extend USA-16"/Canada-18" in front of the heater and 8" to the side (measured from door opening in the USA and measured from the side of the unit in Canada).

Clearances to Combustibles					
Model	*A	*B	*C	*D	E(1)
C260	30" 762mm	20" 508mm	20" 508mm	15" 381mm	8" 200mm
C260 with mantel and/or side shields ①	17" 432mm	14-1/2" 508mm	20" 508mm	8" 200mm	8" 200mm


Model	F (1)	G	H	J	M
C260	22" 559mm	14" 356mm	22-1/2" 572mm	5-1/4" 133mm	50-1/2" 1283mm
C260 with mantel and/or side shields	22" 559mm	14" 356mm	22-1/2" 572mm	5-1/4" 133mm	38" 965mm

\* Reduced clearances may be available for A, B, C and D dimensions per NFPA 211 - latest edition, Standard for Chimneys, Fireplaces, Vents, and Solid Fuel-Burning Appliances (in Canada CSA B365 - latest edition). See section on "Reduction of Appliance Clearance with Specified Forms of Protection."


\*\* Side view of optional mantel deflector shown.

(1)Hearth extension reductions: 2" (51mm) reduction for 2" (51mm) raised hearth. (USA) 16" minimum hearth extension on all stoves as measured from the door opening of the unit. (Canada) 18"(450mm) minimum hearth extension on all stoves as measured from the door opening of the unit. Minimum distance of floor protection to the side = 8" (200mm). This is measured from the sides of the door opening in the USA and from the sides of the insert in Canada.

**NOTE:** Facing material that projects more than 3/4" (19mm) from the wall is considered a mantel or side wall.

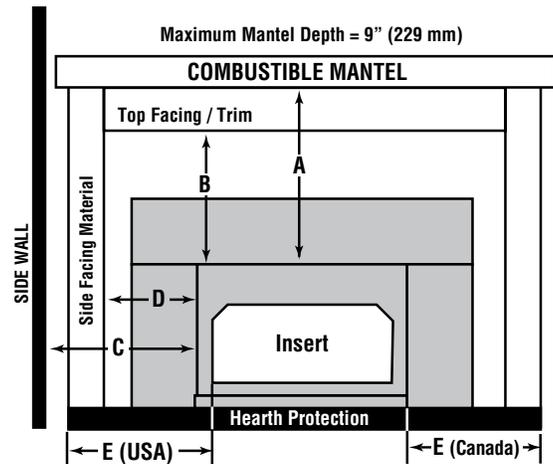

Clearance Figures

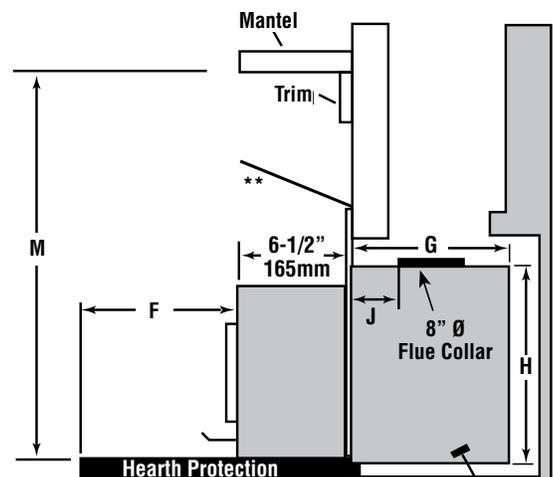

Fireplace Sizing	
C260	Masonry Fireplace UBC Chapter 37
Depth Min.	14-3/4" (375mm)
Height Min. ①	22-3/4" (578mm)
Width Min.	30-1/2" (775mm)
Lintel Max. Depth ①	5-1/4" (133mm)

① Without use of adjustable offset box or smoke deflector

Hearth

Clearances