

# concept 2 air



\* Wood stoves

## BRAND NEW ON THE MARKET !!! FULLY CONTROLLED BURNING OF SOLID FUEL

CONCEPT 2 AIR and CONCEPT 2 MINI AIR cookers are designed for space heating, cooking and baking. They use solid fuel: dry wood, coal or briquettes. They give the impression of a fireplace, thanks to the fireproof glass on the firebox door.




■ INOX ■ GRAY

# 5 YEARS WARRANTY



Openings for secondary airflow allow air supply in the area of glass door firebox which prevents the formation of soot deposits on the glass. This unique form of adjusting primary and secondary airflow is a new concept in the field of standard solid fuel stoves for households\*

\* Continue reading on next page

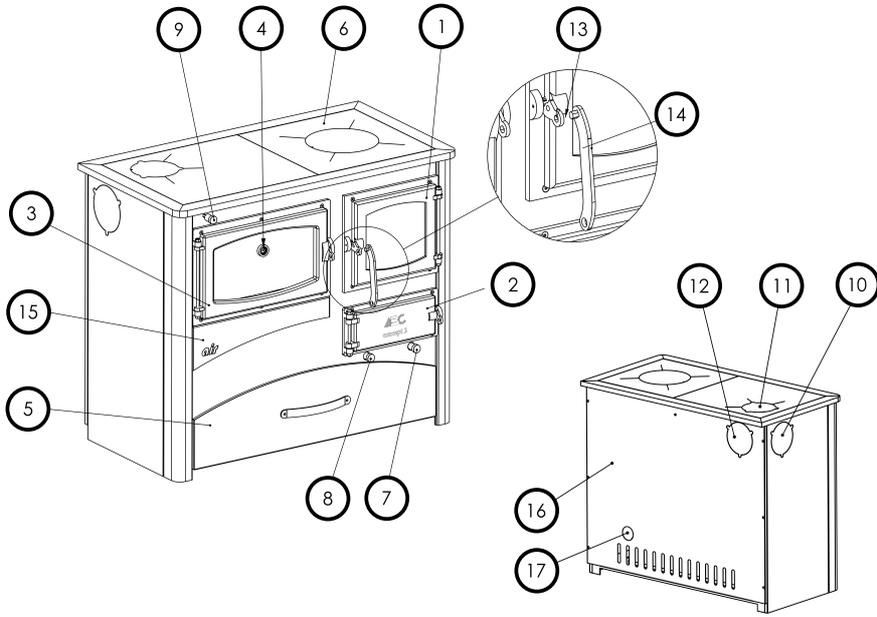

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1. Firebox door</li> <li>2. Ashtray door</li> <li>3. Oven door</li> <li>4. Oven thermometer</li> <li>5. Firewood drawer</li> <li>6. Hobs</li> <li>7. Primary airflow controller</li> <li>8. Secondary airflow controller</li> <li>9. Smoke direction controller</li> </ul> | <ul style="list-style-type: none"> <li>10. Stovepipe connection, side</li> <li>11. Stovepipe connection, through hob</li> <li>12. Stovepipe connection, rear</li> <li>13. Latch for closing doors</li> <li>14. Removable handle</li> <li>15. Cover of cleaning opening</li> <li>16. Rear side</li> <li>17. Opening for outdoor air supply</li> </ul> |
|---|--|

CHARACTERISTICS	UNIT	ABC CONCEPT 2 AIR
Power	kW	5 – 12
Degree of efficiency - wood	%	85
Weight	kg	190
<b>COOKER DIMENSIONS</b>		
Width	mm	1010
Height	mm	850
Depth	mm	535
<b>OVEN DIMENSIONS</b>		
Width	mm	420
Height	mm	230
Depth	mm	410
Stovepipe connection/chimney	mm	Ø120
Required airflow	Pa	12

# concept 2 mini air



\* Wood stoves

\*The structure of the CONCEPT 2 AIR and CONCEPT 2 MINI AIRcookers ensures precise temperature setting, easy stoke and cleaning out ashes.

State of the art control of primary and secondary airflow provides to user an immediate control of fire intensity.



■ INOX ■ GRAY

## 5 YEARS WARRANTY


CONCEPT 2 AIR and CONCEPT 2 MINI AIR cookers are made of certified boiler sheets with the guaranteed chemical composition and mechanical properties at elevated temperatures. It is welded using the latest methods of robotic welding.



CONCEPT 2 AIR and CONCEPT 2 MINI AIR cookers provide :

- reliable service,
- high efficiency (85%),
- preservation of the environment (environmentally sound) and
- long life, along with compliance with recommendations for the proper installation and operation, proven by 5 years warranty (2 years for chamotte parts).

\* Continuation of text from the previous page

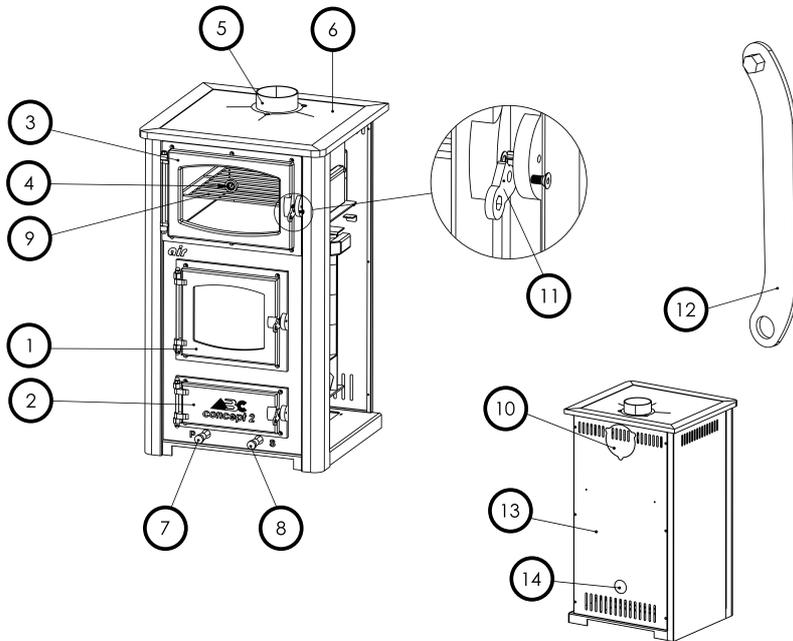

- |  |  |
|--|--|
| 1. Firebox door                          | 8. Secondary "S" airflow (draft) regulator |
| 2. Ashtray door                          | 9. Oven grate                              |
| 3. Oven door                             | 10. Stovepipe connection, back             |
| 4. Oven thermometer                      | 11. Latch for closing the door             |
| 5. Firewood drawer                       | 12. Removable handle                       |
| 6. Hob                                   | 13. Rear side (back)                       |
| 7. Primary "P" airflow (draft) regulator | 14. Opening for outside air intake         |

CHARACTERISTICS	UNIT	ABC CONCEPT 2 MINI AIR
Power	kW	4 – 10
Degree of efficiency - wood	%	85
Weight	kg	155
<b>COOKER DIMENSIONS</b>		
Width	mm	565
Height	mm	975
Depth	mm	520
<b>OVEN DIMENSIONS</b>		
Width	mm	350
Height	mm	230
Depth	mm	410
Stovepipe connection/chimney	mm	Ø120
Required airflow	Pa	12